



aerospace  
climate control  
electromechanical  
filtration  
fluid & gas handling  
**hydraulics**  
pneumatics  
process control  
sealing & shielding



## VP04 Remote Control

Pneumatic Proportional Remote Control Valve



ENGINEERING YOUR SUCCESS.

## Catalogue layout

This catalogue has been designed to give a brief overview of the VP04, and to make it easy for you to study and choose from the different options available, so that we may customize your remote control valve in accordance with your wishes. In addition to general information and basic technical data, the brochure therefore contains descriptions of the options available for the valve. Each function area is given as a subheading, e.g. **Connections**, followed by a brief description. This is followed by a series of coded options, e.g. **M, S, P** together with a brief description of what each code represents.

## How to order your valve

To specify your valve, simply choose the options you require and enter the corresponding code into the appropriate box in the Order code on page 4.

When all the order code boxes are completed, please check the list on page 5 if it exists a part number for your code.

Should you require assistance completing the order code or if your code does not exist, please do not hesitate to contact your nearest Parker Hannifin representative.

The information from your order code is then entered into our computerized valve specification program, which initiates the assembly process and generates a unique product ID number that is subsequently stamped into the data plate on your valve, or if you have completed an order code this will be stamped into the plate. Your valve specifications remain on our database to facilitate subsequent re-ordering or servicing of your valve.

## Early consultation with Parker Hannifin saves time and money

Our experienced engineers have in-depth knowledge of the different types of hydraulic system and the ways in which they work. They are at your disposal to offer qualified advice on the best system for the desired combination of functions, control characteristics and economic demands. By consulting Parker early in the project planning stage, you are assured of a comprehensive hydraulic system that gives your machine the best possible operating and control characteristics.

### Conversion factors

1 kg	= 2.2046 lb
1 N	= 0.22481 lbf
1 bar	= 14.504 psi
1 l	= 0.21997 UK gallon
1 l	= 0.26417 US gallon
1 cm <sup>3</sup>	= 0.061024 in <sup>3</sup>
1 m	= 3.2808 feet
1 mm	= 0.03937 in
9/5 °C + 32	= °F

Parker reserves the right to modify products without prior notice. Typical curves and diagrams are used in this catalogue. Even though the catalogue is revised and updated continuously, there is always the possibility of errors. For more detailed information about the products, please contact Parker Hannifin.



## WARNING – USER RESPONSIBILITY

**FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**

This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

## Offer of Sale

Please contact your Parker representation for a detailed "Offer of Sale".

**List of contents**

	<b>Page</b>
Catalogue Information .....	2
Conversion factors .....	2
General Information .....	4
Order code .....	4-5
Technical Data .....	6
Electrical data .....	7
Breaking capacity .....	7
Connections .....	7
Weight .....	7
Control-pressure characteristic .....	7
Circuit .....	7
Control-pressure ports .....	8
Connection options .....	8
Lever options .....	8
Control-pressure options .....	9
Lever detent options .....	9
Dimensional drawings .....	10-11

## General

The VP04 is a stackable, pneumatic control-pressure valve intended for the proportional, pneumatic remote control of directional valves, positioning cylinders etc. It can be supplied with a coordinate lever (joystick) or different linear levers.

## **Freedom in machine design**

Good machine design is heavily dependent on the availability of flexible components and systems that can be combined in different ways to give optimum operating and control characteristics. Parker Hannifin control systems give you the freedom to design your machines the way you want them, since they themselves are designed to enable components such as directional valves and other control devices to be located ideally on the machine. This gives advantages in production too, since it greatly facilitates the building of machine subassemblies at different sites prior to collation for final assembly.

Moreover, the wide range of Parker Hannifin pneumatic, hydraulic and electric control devices enables optimum design of the machine-control station in terms of ergonomics. (Please see separate brochures for information about our hydraulic and electric remote-control systems.)

## Safety

In spite of the sophistication of the final functions it may serve, the VP04 remote control valve is of robust and simple construction. This greatly facilitates training and servicing which, together with predictable control characteristics and great dependability, does much to improve the operational safety of the machine.


## Design

The valve is made up of sections, each of which contains two 3-way pressure reducing valves (one per signal port). Up to 8 sections can be stacked together to give a total of 16 signal ports. The valve can be equipped with either one linear lever per section, or with a coordinate lever (joystick) when two sections are stacked to give four signal ports.

## Essential characteristics

- Low, well adapted operating forces and short lever strokes give good operator comfort.
- Small dimensions enable simple, compact installation.
- Push-in couplings enable fast, simple connection.
- Low hysteresis ensures consistent pressure output value for a given lever stroke.
- Simple design makes the valve easy to service.
- Quality materials and great precision in manufacturing, assembly and testing assure you of a quality product with low internal leakage and long service life.
- Wide range of control devices and accessories gives great flexibility in system design.
- Total compatibility with Parker Hannifin directional valves gives predictable and harmonious system characteristics.

## Order code

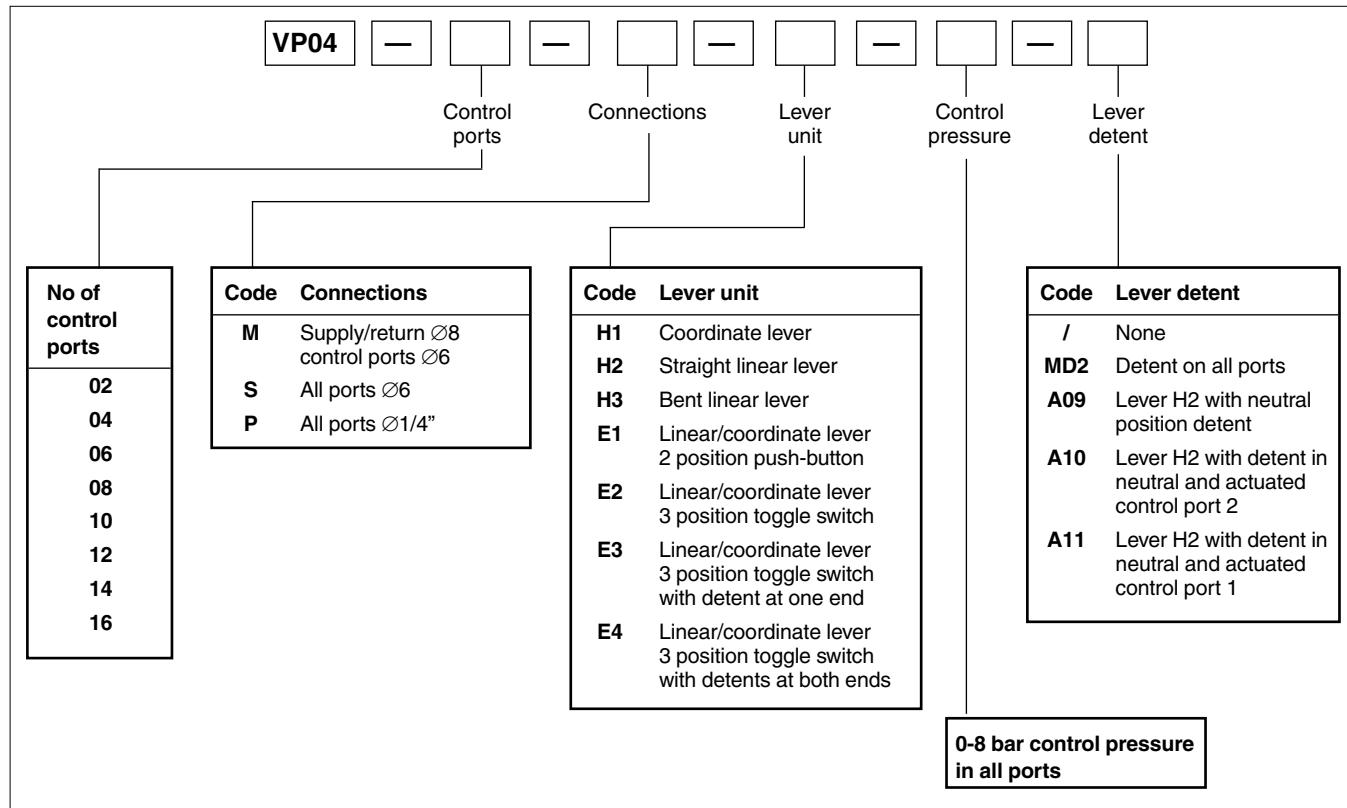

*See page 8 – 9 for further description of different options.*

**Order code****How to order your valve**

To specify your valve, simply choose the options you require and enter the corresponding code into the appropriate box in the Order code above.

When all the order code boxes are completed, please check the list below if it exists a part number for your code.

Should you require assistance completing the order code or if your code does not exist, please do not hesitate to contact your nearest Parker Hannifin representative.

**VP04 Joystick**


Code	Specification number	Part number
VP04-4-M-H1-8-/	VP04-4-3742	20079096
VP04-4-M-E1-8-/	VP04-4-3744	20079092
VP04-4-M-E2-8-/	VP04-0007	20004538
VP04-4-M-E3-8-/	VP04-4-3745	20079094
VP04-4-M-E4-8-/	VP04-4-3713	20078929
VP04-4-S-H1-8-/	VP04-4-3035	20075063
VP04-4-S-E1-8-/	VP04-4-3036	20079093
VP04-4-S-E2-8-/	VP04-4-3037	20079304
VP04-4-S-E3-8-/	VP04-4-3598	20078161
VP04-4-S-E4-8-/	VP04-4-3743	20079095
VP04-4-P-H1-8-/	VP04-0639	20012700
VP04-4-P-E1-8-/	VP04-4-3746	20079091
VP04-4-P-E2-8-/	VP04-4-2539	20070819
VP04-4-P-E3-8-/	VP04-4-3527	20077306
VP04-4-P-E4-8-/	VP04-4-3739	20079071

**VP04 Linear lever**

Code	Specification number	Part number
VP04-2-M-H2-8-/	VP04-0001	8234971607
VP04-2-M-H3-8-/	VP04-0585	20008037
VP04-2-M-E1-8-/	VP04-2-3451	20076974
VP04-2-M-E2-8-/	VP04-2-3747	20079090
VP04-2-M-E3-8-/	VP04-2-3748	20079089
VP04-2-M-E4-8-/	VP04-2-3712	20078930
VP04-2-M-A09-8-/	VP04-2-3871	20079750
VP04-2-M-H2-8-MD2	VP04-2-3724	20078973
VP04-2-M-E4-8-MD2	VP04-2-3714	20078941
VP04-2-S-H2-8-/	VP04-2-3032	20077533
VP04-2-S-H3-8-/	VP04-2-3033	20075936
VP04-2-S-E1-8-/	VP04-2-3073	20074877
VP04-2-S-E2-8-/	VP04-2-3388	20076728
VP04-2-S-E3-8-/	VP04-2-3577	20078093
VP04-2-S-E4-8-/	VP04-2-3771	20079305
VP04-2-S-A09-8-/	VP04-2-3721	20078950
VP04-2-S-A10-8-/	VP04-2-3034	20078925
VP04-2-S-H2-8-MD2	VP04-2-3720	20078951
VP04-2-P-X-8-/	VP04-0640	20012701

**Remote Control – Pneumatic****VP04**

Code	Specification number	Part number
VP04-2-P-H2-8-/	VP04-2-3737	20079073
VP04-2-P-H3-8-/	VP04-0579	20007541
VP04-2-P-E1-8-/	VP04-2-3540	20077473
VP04-2-P-E2-8-/	VP04-2-3716	20078943
VP04-2-P-E3-8-/	VP04-2-3749	20079306
VP04-2-P-E4-8-/	VP04-2-3738	20079072
VP04-2-P-H2-8-MD2	VP04-2-3782	20079124
VP04-2-P-A09-8-/	VP04-2-3375	20077163
VP04-2-P-E1-8-MD2	VP04-2-3649	20078509
VP04-4-M-H2-8-/	VP04-4-3501	20079307
VP04-4-M-H3-8-/	VP04-4-2745	20072188
VP04-4-S-H2-8-/	VP04-4-3251	20079308
VP04-4-S-H3-8-/	VP04-4-3750	20079309
VP04-4-S-H2-8-MD2	VP04-4-3790	20079181
VP04-4-P-H2-8-/	VP04-4-2733	20079007
VP04-4-P-H3-8-/	VP04-4-3751	20079310
VP04-6-M-H2-8-/	VP04-6-3752	20079583
VP04-6-M-H3-8-/	VP04-6-3753	20079584
VP04-6-S-H2-8-/	VP04-6-3754	20079585
VP04-6-S-H3-8-/	VP04-6-3755	20079586
VP04-6-S-H2-8-MD2	VP04-6-3791	20079180
VP04-6-P-H2-8-/	VP04-6-2536	20071515
VP04-6-P-H3-8-/	VP04-6-3756	20079587
VP04-8-M-H2-8-/	VP04-8-3502	20079588
VP04-8-M-H3-8-/	VP04-8-3757	20079589
VP04-8-S-H2-8-/	VP04-8-3758	20079590
VP04-8-S-H3-8-/	VP04-8-3759	20079591
VP04-8-S-H2-8-MD2	VP04-8-3792	20079179
VP04-8-P-H2-8-/	VP04-8-3760	20079592
VP04-8-P-H3-8-/	VP04-8-3333	20076474
VP04-10-M-H2-8-/	VP04-10-3761	20079593
VP04-10-M-H3-8-/	VP04-10-3762	20079594
VP04-10-S-H2-8-/	VP04-10-3536	20077385
VP04-10-S-H3-8-/	VP04-10-3763	20079595
VP04-10-P-H2-8-/	VP04-10-3764	20079596
VP04-10-P-H3-8-/	VP04-10-3765	20079597
VP04-12-M-H2-8-/	VP04-12-3185	20075705
VP04-12-M-H3-8-/	VP04-12-3766	20079598
VP04-12-S-H2-8-/	VP04-12-3767	20079599
VP04-12-S-H3-8-/	VP04-12-3768	20079600
VP04-12-S-H3-8-MD2	VP04-12-3245	20076001
VP04-12-P-H2-8-/	VP04-12-3769	20079601
VP04-12-P-H3-8-/	VP04-12-3770	20079602
VP04-14-M-H2-8-/	VP04-14-3772	20079603
VP04-14-M-H3-8-/	VP04-14-3773	20079604
VP04-14-S-H2-8-/	VP04-14-3774	20079605
VP04-14-S-H3-8-/	VP04-14-2793	20072465
VP04-14-P-H2-8-/	VP04-14-3775	20079606
VP04-14-P-H3-8-/	VP04-14-3776	20079607

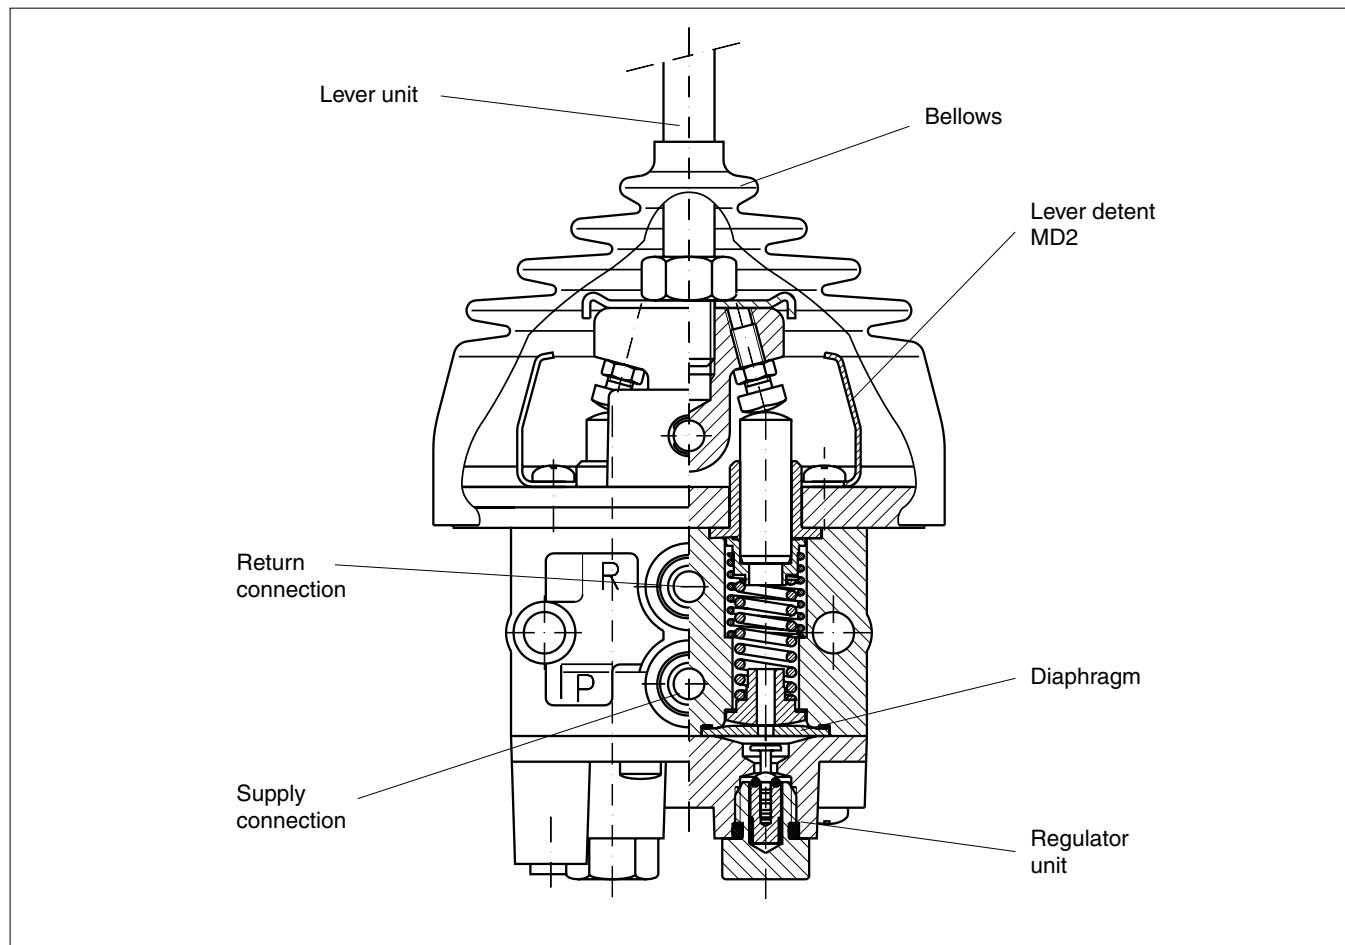**Pressure**

Supply pressure (at least 2 bar higher than max. control pressure)	max. 10 bar (145 psi)
Control pressure	max. 8 bar (116 psi)

**Lever forces**

Normal force for linear lever fully actuated	3.1 Nm (2.29 lbf·ft)
Normal force for coordinate lever one function fully actuated	3.9 Nm (2.88 lbf·ft)
two functions fully actuated	5.5 Nm (4.06 lbf·ft)

**Volume rate of flow**

Control flow at $\Delta p = 6$ bar (87 psi)	7 Nl/s (14.8 cfm free flow)
---	-----------------------------

**Hysteresis**

Hysteresis	max. 1 bar (14.5 psi)
------------	-----------------------

**Temperature**

Min. ambient temperature	-30 °C (86 °F) (assuming dry air or use of agent to reduce freezing-point).
Max. ambient temperature	+70 °C (158 °F)

**Air quality**

The air quality determines the service life of the valve.  
See ISO 8573.

**Filter**

Filtration	max. 20 $\mu\text{m}$ or better
------------	---------------------------------

**Warning**

If the filtration demands are not met, the valve poppet can jam in the open position, with the result that the valve remains actuated. It is not possible to force back a jammed poppet mechanically.

**Electrical data**

Concerns switch in E-type levers.

Data given below is what is needed to obtain maximum service life. The values can be exceeded with retained function, but will result in a reduction in service life. In the event of inductive loading, a protective diode must be fitted.

**Breaking capacity**

DC, resistive loading	2A/24V
DC or AC, inductive loading	1A/24V

**Connections**

All connections are equipped with push-in connectors and are available for different pipe dimensions.

Signal ports are available with connections for Ø6 mm or Ø1/4" pipe. Supply and return ports are available with connections for Ø6 mm, Ø8 mm or Ø1/4" pipe.

**Weight**

The weight of the unit varies somewhat, depending on configuration.

Linear lever approx.	0.8 kg/section (1.76 lb)
Coordinate lever	approx. 1.7 kg (3.75 lb)

**Control-pressure characteristic**

Control-pressure in bar



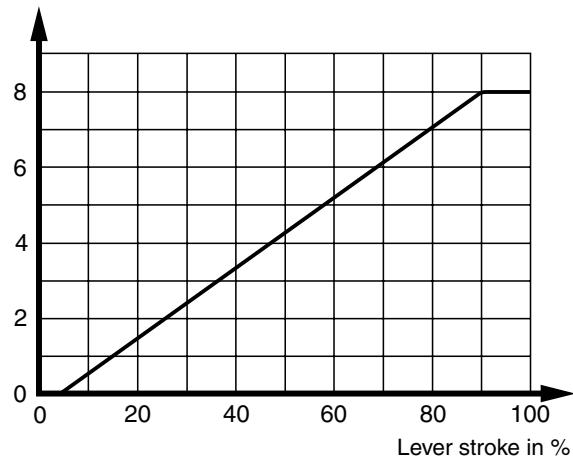


Diagram showing control-pressure characteristic of the VP04-valve. Valid for 8 - 10 bar supply pressure. If lower the curve will level out at obtained supply pressure.

**Circuit**

Circuit diagram showing two-section VP04 with two linear levers controlling one hydraulic directional valve with two spool sections.

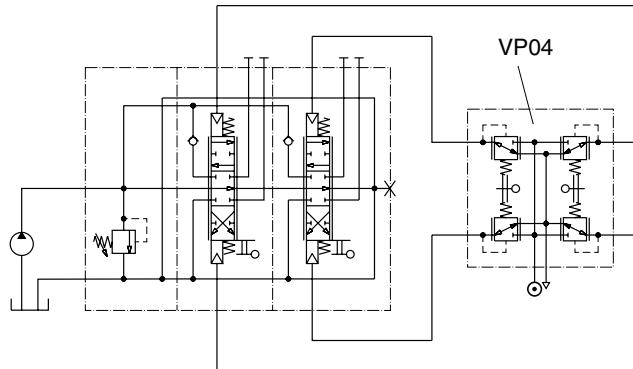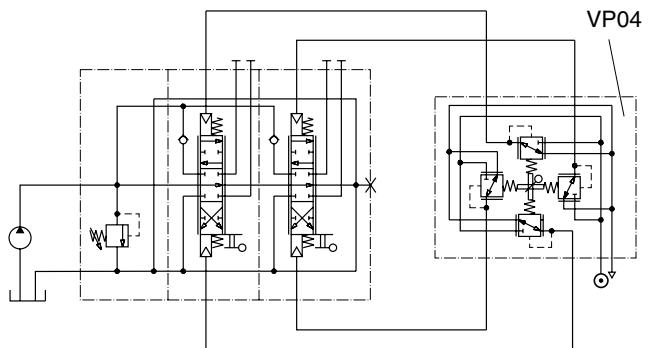


Circuit diagram showing two-section VP04 with one coordinate lever (joystick) controlling one hydraulic directional valve with two spool sections.

**Every valve is customized. The following options are used to configure a valve.**

**Control-pressure ports [1]**

2-16 Each valve section contains two control-pressure ports. Two valve sections are needed for coordinate levers (joysticks), since they require 4 control-pressure ports.

**E1**

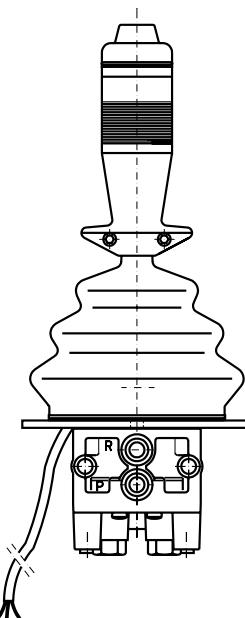

**Connection options [2]**

**M** For Ø8 mm pipe in supply and return ports, and Ø6 mm pipe in the control-pressure ports.

**S** For Ø6 mm pipe in all ports.

**P** For Ø1/4" pipe in all ports.

**Lever options [3]**

Lever units are available in several different versions. For coordinate movements (4 control-pressure ports), the H1, E1, E2, E3 and E4 units can be used.

For linear movements (2 control-pressure ports), the H2, H3, E1, E2, E3 and E4 units can be used. Owing to the width of the lever unit, only E-levers can be used for valves containing two control-pressure ports. E-levers contain a switch that can be used for different external functions.

**H1** Coordinate lever (joystick) with ball.

**H2** Straight linear lever with ball.

**H3** Bent linear lever with ball.

**E1** Linear or coordinate lever (joystick) with 2-position push-button switch.


**E2** Linear or coordinate lever (joystick) with 3-position, spring-centred toggle switch.

**E3** Linear or coordinate lever (joystick) with 3-position toggle switch with detent at one end position.


**E4** Linear or coordinate lever (joystick) with 3-position toggle switch with detents at both end positions.

**A28** Linear lever with 5 instantaneous switches and the cable is equipped with a Deutsch connector DT04-6P.


Switch symbol

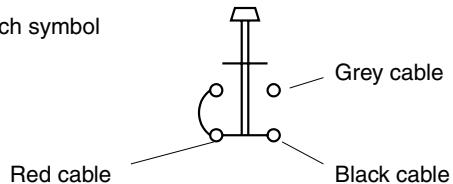

**E2, E3, E4**

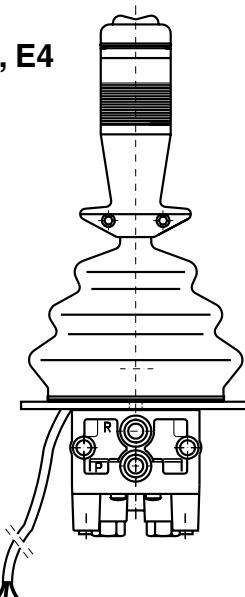

Switch symbol

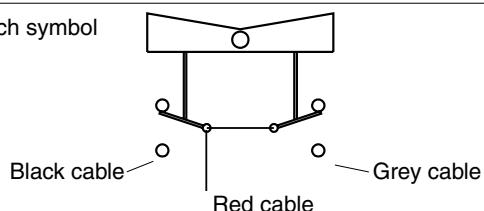

**Control-pressure options [4]**

The control-pressure curve is proportional to the lever stroke. For maximum signal pressure to be obtained, the supply pressure must be at least 2 bar higher than the maximum control pressure.

**8** Max. actuation gives a 8 bar control-pressure signal.  
**A24** Max. actuation gives a 7 bar control-pressure signal.


**Lever detent options [5]**

**MD2** Detent for linear levers that locks the lever in the fully actuated position. The lever is moved out of the detented position by pulling it to release the detent.

**A09** Detent for H2 lever that locks the lever in the neutral position. To move the lever out of neutral, the detent must be disengaged by lifting with the fingers.


**A10** Same as A09, but locks the lever in the neutral position and in one fully actuated position (port 2).




**A11** Same as A09, but locks the lever in the neutral position and in one fully actuated position (port 1).

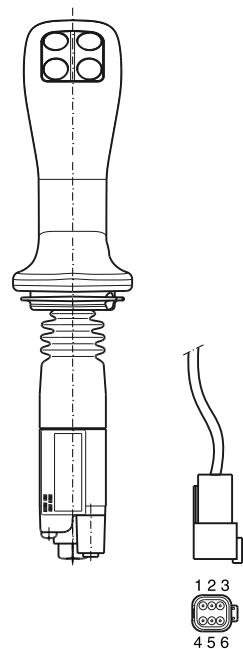
**A28**

Breaker symbol (colours of output cables)

Push button

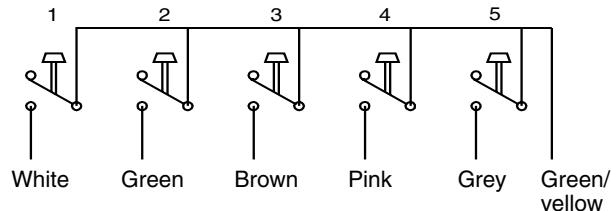

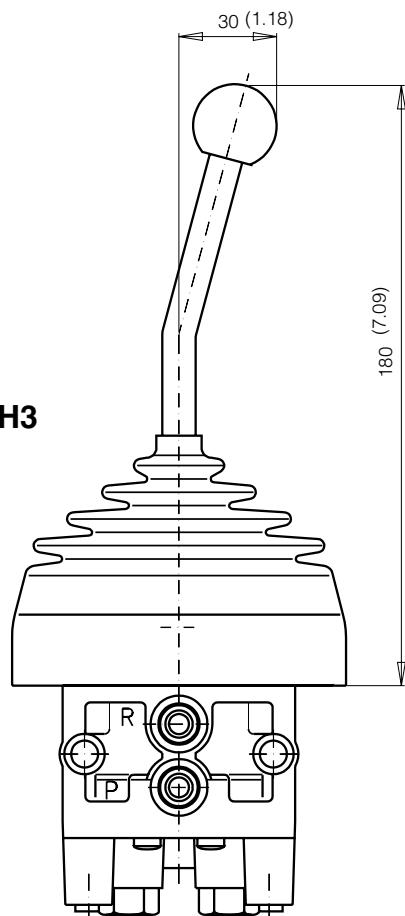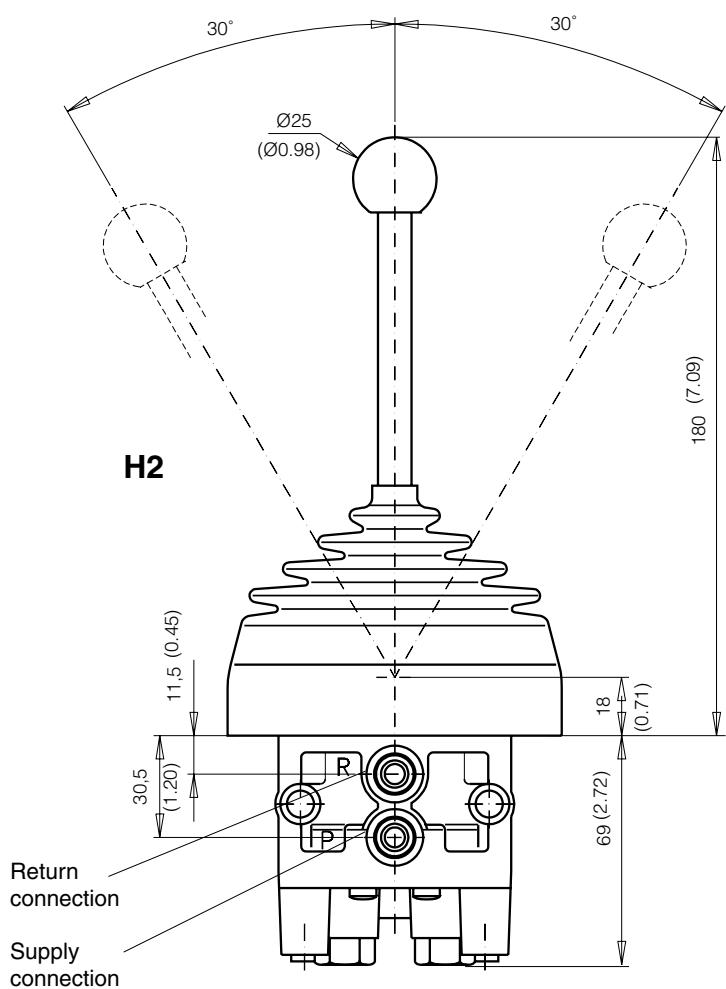
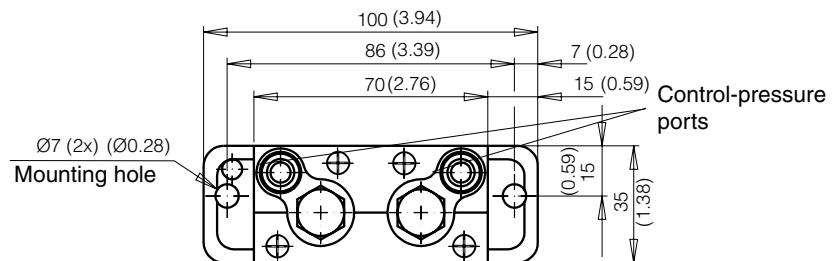


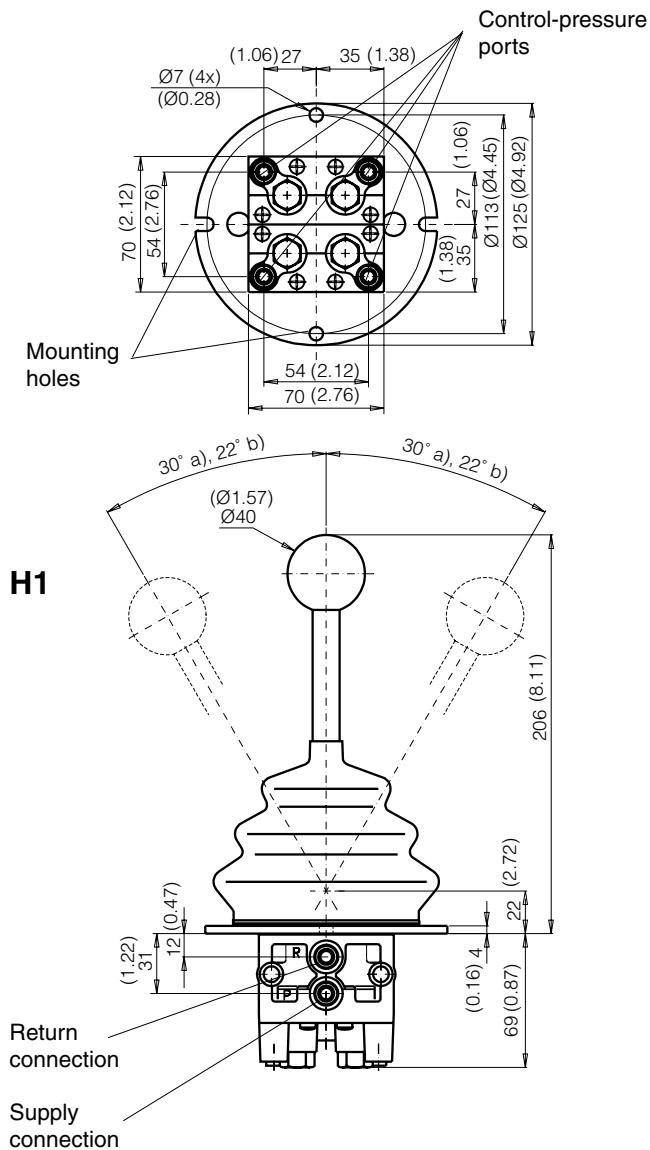

a) Applies to max. actuation of two function.  
 b) Applies to max. actuation of one functions.

E1

E2, E3, E4

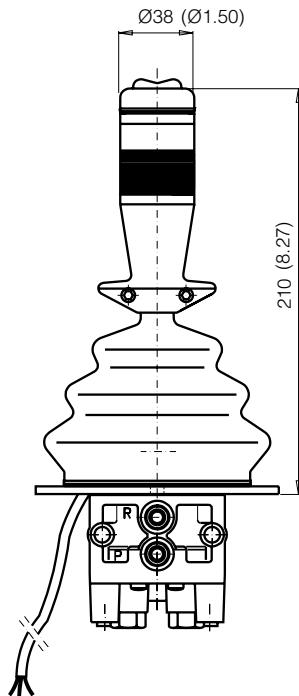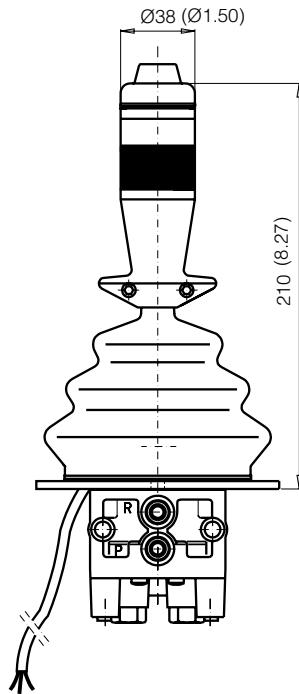

# Parker Worldwide

## Europe, Middle East, Africa

### AE – United Arab Emirates,

Dubai

Tel: +971 4 8127100

parker.me@parker.com

### AT – Austria, Wiener Neustadt

Tel: +43 (0)2622 23501-0

parker.austria@parker.com

### AT – Eastern Europe, Wiener

Neustadt

Tel: +43 (0)2622 23501 900

parker.eastern@parker.com

### AZ – Azerbaijan, Baku

Tel: +994 50 2233 458

parker.azerbaijan@parker.com

### BE/LU – Belgium, Nivelles

Tel: +32 (0)67 280 900

parker.belgium@parker.com

### BY – Belarus, Minsk

Tel: +375 17 209 9399

parker.belarus@parker.com

### CH – Switzerland, Etoy

Tel: +41 (0)21 821 87 00

parker.switzerland@parker.com

### CZ – Czech Republic, Klecany

Tel: +420 284 083 111

parker.czechrepublic@parker.com

### DE – Germany, Kaarst

Tel: +49 (0)2131 4016 0

parker.germany@parker.com

### DK – Denmark, Ballerup

Tel: +45 43 56 04 00

parker.denmark@parker.com

### ES – Spain, Madrid

Tel: +34 902 330 001

parker.spain@parker.com

### FI – Finland, Vantaa

Tel: +358 (0)20 753 2500

parker.finland@parker.com

### FR – France, Contamine s/Arve

Tel: +33 (0)4 50 25 80 25

parker.france@parker.com

### GR – Greece, Athens

Tel: +30 210 933 6450

parker.greece@parker.com

### HU – Hungary, Budapest

Tel: +36 1 220 4155

parker.hungary@parker.com

### IE – Ireland, Dublin

Tel: +353 (0)1 466 6370

parker.ireland@parker.com

### IT – Italy, Corsico (MI)

Tel: +39 02 45 19 21

parker.italy@parker.com

### KZ – Kazakhstan, Almaty

Tel: +7 7272 505 800

parker.eastern@parker.com

### NL – The Netherlands, Oldenzaal

Tel: +31 (0)541 585 000

parker.nl@parker.com

### NO – Norway, Asker

Tel: +47 66 75 34 00

parker.norway@parker.com

### PL – Poland, Warsaw

Tel: +48 (0)22 573 24 00

parker.poland@parker.com

### PT – Portugal, Leca da Palmeira

Tel: +351 22 999 7360

parker.portugal@parker.com

### RO – Romania, Bucharest

Tel: +40 21 252 1382

parker.romania@parker.com

### RU – Russia, Moscow

Tel: +7 495 645-2156

parker.russia@parker.com

### SE – Sweden, Spånga

Tel: +46 (0)8 59 79 50 00

parker.sweden@parker.com

### SK – Slovakia, Banská Bystrica

Tel: +421 484 162 252

parker.slovakia@parker.com

### SL – Slovenia, Novo Mesto

Tel: +386 7 337 6650

parker.slovenia@parker.com

### TR – Turkey, Istanbul

Tel: +90 216 4997081

parker.turkey@parker.com

### UA – Ukraine, Kiev

Tel +380 44 494 2731

parker.ukraine@parker.com

### UK – United Kingdom, Warwick

Tel: +44 (0)1926 317 878

parker.uk@parker.com

### ZA – South Africa, Kempton Park

Tel: +27 (0)11 961 0700

parker.southafrica@parker.com

## North America

### CA – Canada, Milton, Ontario

Tel: +1 905 693 3000

### US – USA, Cleveland (industrial)

Tel: +1 216 896 3000

### US – USA, Elk Grove Village (mobile)

Tel: +1 847 258 6200

## Asia Pacific

### AU – Australia, Castle Hill

Tel: +61 (0)2-9634 7777

### CN – China, Shanghai

Tel: +86 21 2899 5000

### HK – Hong Kong

Tel: +852 2428 8008

### IN – India, Mumbai

Tel: +91 22 6513 7081-85

### JP – Japan, Fujisawa

Tel: +81 (0)4 6635 3050

### KR – South Korea, Seoul

Tel: +82 2 559 0400

### MY – Malaysia, Shah Alam

Tel: +60 3 7849 0800

### NZ – New Zealand, Mt Wellington

Tel: +64 9 574 1744

### SG – Singapore

Tel: +65 6887 6300

### TH – Thailand, Bangkok

Tel: +662 717 8140

### TW – Taiwan, Taipei

Tel: +886 2 2298 8987

## South America

### AR – Argentina, Buenos Aires

Tel: +54 3327 44 4129

### BR – Brazil, Cachoeirinha RS

Tel: +55 51 3470 9144

### CL – Chile, Santiago

Tel: +56 2 623 1216

### MX – Mexico, Apodaca

Tel: +52 81 8156 6000

Ed. 2011-03-23

## EMEA Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

## US Product Information Centre

Toll-free number: 1-800-27 27 537

[www.parker.com](http://www.parker.com)

Your local authorized Parker distributor

