
EW EO-3® Adjustable swivel Elbow

X1) O-ring
X2) Indication-ring
T1 = Special thread
caracteristic-Ø



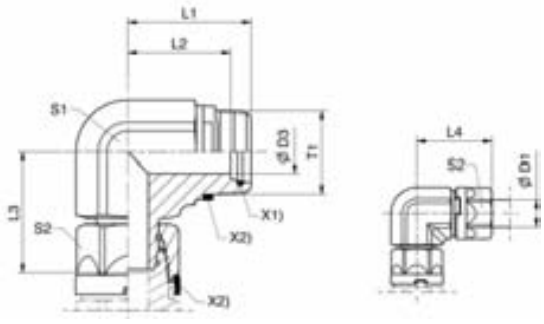

D1	D3	T1	L1	L2	L3	L4	S1	S2	Weight g/1 piece	Order code*	PN
6**	4	11.5	22	17.5	21.5	27	12	14	36	**EW06P3OMDCF**	420
8	6	14.5	25.5	20.5	25	31.5	14	17	56	**EW08P3OMDCF**	420
10**	8	16.5	25	20	26.5	31.5	17	19	75	**EW10P3OMDCF**	420
12	10	19	29	24	27	35.5	19	22	101	**EW12P3OMDCF**	420
15**	12	24	36	31	34.5	44	24	27	205	**EW15P3OMDCF**	420
16**	12	24	36	30	34.5	44	24	27	178	**EW16P3OMDCF**	420
18	15	26	39	33	34.5	47	27	30	249	**EW18P3OMDCF**	420
20**	16	29.5	40	34	38	49.5	27	32	282	**EW20P3OMDCF**	420
22**	18	29.5	36	30	37.5	42.5	27	32	231	**EW22P3OMDCF**	250
25	20	37	49	42	49.5	59	41	41	747	**EW25P3OMDCF**	420
28	24	37	45	38	47.5	53.5	41	41	616	**EW28P3OMDCF**	250
30	25	43.5	55.5	47.5	55.5	67.5	48	50	1146	**EW30P3OMDCF**	420
35	30	45	51.5	43.5	53	61.5	48	50	925	**EW35P3OMDCF**	250
38	32	52	60	51	60	73	50	60	1328	**EW38P3OMDCF**	420
42	36	52	56	48	56	66	50	60	1018	**EW42P3OMDCF**	250

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut at tube side
** Attention! Because of forging adjustments, dimensions differ from previous catalouge (4131-1).
* Please add the **suffixes** below according to the sealing material required
NBR = Standard. no suffix required
FKM = on request

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark