
Stainless Steel Compression Fittings

1824 Stainless Steel Olive



Stainless steel 316L



ØD		kg
6	1824 06 00	0.001
8	1824 08 00	0.001
10	1824 10 00	0.003
12	1824 12 00	0.004
16	1824 16 00	0.005

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark

Complementary Stainless Steel Fittings Reducers, Olives and Nuts

This innovative reducer system, using a full range of nuts and olives, enables **different diameters** of stainless steel, fluoropolymer or polymer tubes to be fitted onto **a single Parker Legris compression fitting**.

Product Advantages



Efficient Solution

- Reduces envelope dimensions
- Quick and easy to assemble, whatever the diameters and tube material
- Improved stock management
- Silicone-free

Multiple Combinations

A single connector for up to 3 different tube materials and sizes.




Example:
- Advanced PE tubing 6 mm O.D.
- stainless steel tubing 8 mm O.D.
- fluoropolymer tubing 12 mm O.D. or braided PVC hose 10 mm I.D.

A full range of olives and nuts to optimise all assembly operations

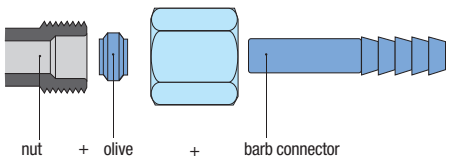
Applications

Food Process
Fluid Transmission
Pneumatics
Automotive Process
Petrochemical
Cooling & Heating
Chemical
Offshore Oil & Gas

Reducer Assembly Procedure

Operation	Assembly Sequence	Assembled Fitting
1 **Assemble the reducer** Place the reducer in the fitting body.	1 	
2 **Assemble the nut and olive** Place the nut and then the olive onto the tube.	2 	
3 **Assemble the nut** Push the tube into the fitting until it bottoms on the reducer. Tighten the nut to the recommended torque (see opposite page).	3 	

Assembly: Barb Connectors



Regulations

DI: 2002/95/EC (RoHS), 2011/65/EC
DI: 97/23/EC (PED)
RG: 1935/2004
RG: 1907/2006 (REACH)
DI: 94/09/EC (ATEX)
FDA: 21 CFR 177.1550
NACE MR0175: compatible materials
ISO 15156-1/-2/-3: compatible materials

Our barb connector 1822 is designed to be also used with different types of hose.
It is secured using the nut and olive provided with the fitting.