
AS Weld connector

Butt weld / EO 24° cone end

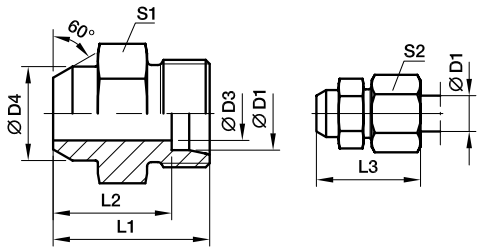

Series	D1	D3	D4	L1	L2	L3	S1	S2	Weight g/1 piece	Order code	PN (bar)[1] Steel	PN (bar)[1] Stainless Steel
L[3])	06	4	10	21	14.0	29	12	14	11	**AS06L**	315	315
	08	6	12	23	16.0	31	14	17	15	**AS08L**	315	315
	10	8	14	25	18.0	33	17	19	22	**AS10L**	315	315
	12	10	16	25	18.0	33	19	22	25	**AS12L**	315	315
	15	12	19	29	22.0	37	22	27	44	**AS15L**	315	315
	18	15	22	31	23.5	40	27	32	67	**AS18L**	315	315
	22	19	27	36	28.5	45	32	36	98	**AS22L**	160	160
	28	24	32	38	30.5	47	41	41	165	**AS28L**	160	160
	35	30	40	43	32.5	54	46	50	232	**AS35L**	160	160
	42	36	46	46	35.0	58	55	60	342	**AS42L**	160	160
S[4])	06	4	11	26	19.0	34	14	17	21	**AS06S**	630	630
	08	5	13	28	21.0	36	17	19	31	**AS08S**	630	630
	10	7	15	30	22.5	39	19	22	41	**AS10S**	630	630
	12	8	17	32	24.5	41	22	24	93	**AS12S**	630	630
	14	10	19	35	27.0	45	24	27	55	**AS14S**	630	630
	16	12	21	35	26.5	45	27	30	82	**AS16S**	400	400
	20	16	26	40	29.5	51	32	36	131	**AS20S**	400	400
	25	20	31	44	32.0	56	41	46	219	**AS25S**	400	400
	30	25	36	49	35.5	62	46	50	297	**AS30S**	400	400
	38	32	44	54	38.0	69	55	60	448	**AS38S**	315	315

[1]) Pressure shown = item deliverable

[3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings or alternative sealing materials see page I7.

M

*Please add the **suffixes** below according to the material/ surface required.

Order code suffixes		
Material	Suffix surface and material	Example
Steel		AS16SX
Stainless Steel	71X	AS16S71X

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark