
## C6MK4 Swivel nut elbow

BSPP 60° cone end (ISO 8434-6) / BSPP 60° Female swivel end (ISO 8434-6)

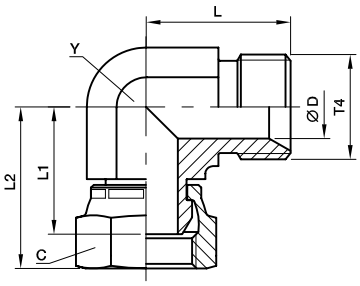


| Thread BSPP T4 | C mm | D mm | L mm | L1 mm | L2 mm | Y mm | Weight (steel) g/1 piece | Adapter Steel | Adapter Stainless Steel | PN (bar) S | PN (bar) SS |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 1/8-28 | 14 | 3.5 | 17 | 18 | 23 | 11 | 26 | **2C6MK4S** | **2C6MK4SS** | 350 | 350 |
| 1/4-19 | 19 | 4.7 | 24 | 25 | 31 | 14 | 62 | **4C6MK4S** | **4C6MK4SS** | 350 | 350 |
| 3/8-19 | 22 | 7.9 | 27 | 26 | 33 | 19 | 104 | **6C6MK4S** | **6C6MK4SS** | 350 | 350 |
| 1/2-14 | 27 | 11.1 | 32 | 32 | 39 | 22 | 159 | **8C6MK4S** | **8C6MK4SS** | 200 | 200 |
| 5/8-14 | 30 | 14.3 | 34 | 30 | 40 | 22 | 158 | **10C6MK4S** | **10C6MK4SS** | 200 | 200 |
| 3/4-14 | 32 | 16.7 | 36 | 33 | 42 | 27 | 226 | **12C6MK4S** | **12C6MK4SS** | 200 | 200 |
| 1-11 | 41 | 22.2 | 42 | 38 | 49 | 33 | 377 | **16C6MK4S** | **16C6MK4SS** | 120 | 120 |
| 1 1/4-11 | 50 | 28.6 | 48 | 48 | 58 | 41 | 650 | **20C6MK4S** | **20C6MK4SS** | 105 | 105 |
| 1 1/2-11 | 60 | 33.3 | 54 | 50 | 63 | 48 | 999 | **24C6MK4S** | **24C6MK4SS** | 105 | 105 |

Order codes shown are part of our current manufacturing programme.

Imperial and metric parts may vary in hexagon dimensions.

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

O



Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark