
DG 102-M Straight male stud ball bearing rotary union

Male metric thread – ED-seal (ISO 9974) / EO 24° cone end

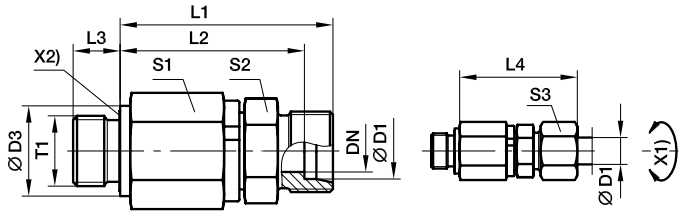

X1) Axis
X2) Eolastic-sealing

Series	D1	T1	DN	D3	L1	L2	L3	L4	S1	S2	S3	Weight g/1 piece	Order code*	CF[1])
S[4])	06	M 14×1.5	5.0	19	49	42.0	12	57.0	22	17	17	112	**DG102/06SMOMD**	
	08	M 14×1.5	5.0	19	49	42.0	12	57.0	22	17	19	113	**DG102/08SMOMD**	Pressure ratings see chart 1
	12	M 18×1.5	9.5	24	60	52.5	12	69.0	30	24	24	245	**DG102/12SMOMD**	
	16	M 22×1.5	9.5	27	60	51.5	14	70.0	30	27	30	259	**DG102/16SMOMD**	
	20	M 27×2.0	16.0	32	76	65.5	16	87.5	41	36	36	558	**DG102/20SMOMD**	
	25	M 33×2.0	16.0	40	78	66.0	18	90.5	41	41	46	637	**DG102/25SMOMD**	Pressure ratings see chart 1
	30	M 42×2.0	26.0	50	89	75.5	20	102.0	60	46	50	1316	**DG102/30SMOMD**	
	38	M 48×2.0	26.0	55	92	76.0	22	107.0	60	55	60	1491	**DG102/38SMOMD**	

[1]) Pressure shown = item deliverable

[4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings or alternative sealing materials see page I7.

*Please add the **suffixes** below according to the material/ surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additonal. suffix needed)
Steel, zinc plated, Cr(VI)-free	CF	DG102/06SMOMDCF	VIT/NBR

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark