
DG 102-R Straight male stud ball bearing rotary union

Male BSPP thread – ED-seal (ISO 1179) / EO 24° cone end

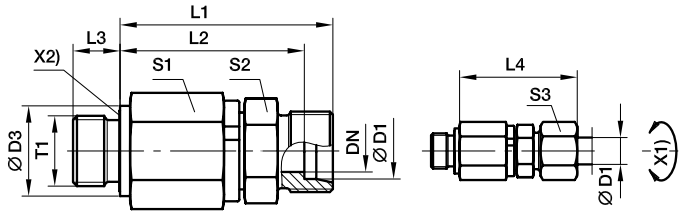

X1) Axis
X2) Eolastic-sealing

Series	D1	T1	DN	D3	L1	L2	L3	L4	S1	S2	S3	Weight g/1 piece	Order code*	CF[1])
S[4])	06	G 1/4 A	5.0	19	49	42.0	12	57.0	22	17	17	110	**DG102/06SROMD**	Pressure ratings see chart 1
	08	G 1/4 A	5.0	19	49	42.0	12	57.0	22	17	19	116	**DG102/08SROMD**	
	12	G 3/8 A	9.5	22	60	52.5	12	69.0	30	24	24	243	**DG102/12SROMD**	
	16	G 1/2 A	9.5	27	60	51.5	14	70.0	30	27	30	256	**DG102/16SROMD**	
	20	G 3/4 A	16.0	32	76	65.5	16	87.5	41	36	36	558	**DG102/20SROMD**	
	25	G 1 A	16.0	40	78	66.0	18	90.5	41	41	46	853	**DG102/25SROMD**	Pressure ratings see chart 1
	30	G 1 1/4 A	26.0	50	89	75.5	20	102.0	60	46	50	1312	**DG102/30SROMD**	
	38	G 1 1/2 A	26.0	55	92	76.0	22	107.0	60	55	60	1494	**DG102/38SROMD**	

[1]) Pressure shown = item deliverable

[4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings or alternative sealing materials see page I7.

Q

*Please add the **suffixes** below according to the material/ surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additonal. suffix needed)
Steel, zinc plated, Cr(VI)-free	CF	DG102/06SROMDCF	VIT/NBR

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark