
DG 101 Straight ball bearing rotary union

EO 24° cone end / EO 24° cone end

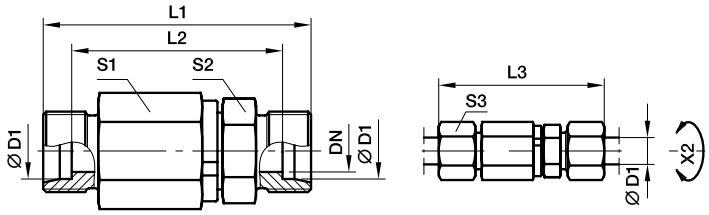

X2) Axis

Series	D1	DN	L1	L2	L3	S1	S2	S3	Weight g/1 piece	Order code*	CF[1])
S[4])	06	5.0	61	47	76	22.0	17	17.0	113	**DG101/06SOMD**	
	08	5.0	61	47	76	22.0	17	19.0	118	**DG101/08SOMD**	Pressure ratings see chart 1
	12	9.5	72	57	89	30.0	24	24.0	258	**DG101/12SOMD**	
	16	9.5	74	57	93	30.0	27	30.0	264	**DG101/16SOMD**	
	20	16.0	92	71	114	41.0	36	36.0	578	**DG101/20SOMD**	
	25	16.0	96	72	120	41.0	41	46.0	652	**DG101/25SOMD**	Pressure ratings see chart 1
	30	26.0	109	82	135	60.0	46	50.0	1321	**DG101/30SOMD**	
	38	26.0	114	82	143	60.0	55	60.0	1509	**DG101/38SOMD**	

[1]) Pressure shown = item deliverable

[4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings or alternative sealing materials see page I7.

*Please add the **suffixes** below according to the material/ surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additonal. suffix needed)
Steel, zinc plated, Cr(VI)-free	CF	DG101/06SOMDCF	VIT

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark