
DVGE-R Straight male stud plain bearing rotary union

Male BSPP thread – ED-seal / EO 24° cone end

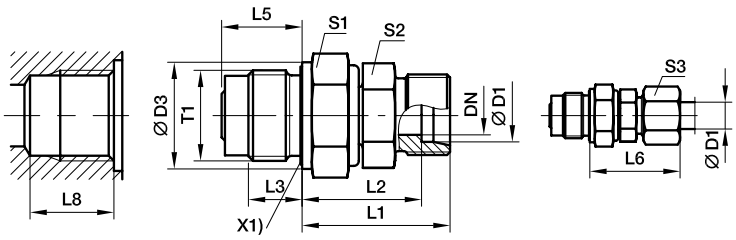

X1) Eolastic-sealing

L8 larger than DIN 3852
chart page Q22

Series	D1	T1	DN	D3	L1	L2	L3	L5	L6	S1	S2	S3	Weight g/1 piece	Order code*	PN (bar)[1] CF	PN (bar)[1] VIT
L[3]	06	G 1/4 A	4.0	19	28.0	21.0	12	18.0	40	19	12	14	43	**DVGE06LROMD**	40	40
	08	G 1/4 A	5.0	19	28.0	21.0	12	18.0	40	19	14	17	44	**DVGE08LROMD**	40	40
	10	G 3/8 A	6.0	22	32.0	25.0	12	18.0	40	24	17	19	74	**DVGE10LROMD**	40	40
	12	G 1/2 A	8.0	27	34.0	27.0	14	21.0	42	27	19	22	116	**DVGE12LROMD**	40	40
	15	G 3/4 A	10.0	32	39.0	32.0	16	24.0	47	32	24	27	214	**DVGE15LROMD**	40	40
	18	G 1 A	16.0	40	42.5	35.0	18	27.5	51	41	27	32	337	**DVGE18LROMD**	40	40
	22	G 1 A	16.0	40	46.5	39.0	18	27.5	55	41	32	36	376	**DVGE22LROMD**	40	40
	28	G 1 1/4 A	22.0	50	48.0	40.5	20	31.0	57	50	41	41	586	**DVGE28LROMD**	40	40
	35	G 1 1/2 A	25.0	55	55.0	44.5	22	35.0	66	55	46	50	868	**DVGE35LROMD**	40	40
S[4]	06	G 1/4 A	4.0	19	30.0	23.0	12	18.0	38	19	14	17	50	**DVGE06SROMD**	100	100
	08	G 1/4 A	5.0	19	31.0	24.0	12	18.0	39	19	17	19	55	**DVGE08SROMD**	100	100
	10	G 3/8 A	6.0	22	34.0	26.5	12	18.0	43	24	19	22	85	**DVGE10SROMD**	100	100
	12	G 1/2 A	8.0	27	36.0	28.5	14	21.0	45	27	22	24	134	**DVGE12SROMD**	100	100
	14	G 3/4 A	10.0	32	41.0	33.0	16	24.0	51	32	24	27	220	**DVGE14SROMD**	100	100
	16	G 3/4 A	10.0	32	42.0	33.5	16	24.0	52	32	27	30	230	**DVGE16SROMD**	100	100
	20	G 1 A	16.0	40	48.5	38.0	18	27.5	60	41	32	36	385	**DVGE20SROMD**	100	100
	25	G 1 A	16.0	40	52.5	40.5	18	27.5	65	41	41	46	483	**DVGE25SROMD**	100	100
	30	G 1 1/4 A	22.0	50	55.0	41.5	20	31.0	68	50	46	50	691	**DVGE30SROMD**	100	100
	38	G 1 1/2 A	25.0	55	63.0	47.0	22	35.0	78	55	55	60	1080	**DVGE38SROMD**	100	100

[1] Pressure shown = item deliverable

[3] L = light series; [4] S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings or alternative sealing materials see page I7.

*Please add the **suffixes** below according to the material/ surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additonal. suffix needed)
Steel, zinc plated, Cr(VI)-free	CF	DVGE06LROMDCF	NBR
FKM	VITCF	DVGE06LROMDVITCF	

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark