
ET Swivel nut branch tee

EO 24° cone end / EO 24° DKO swivel

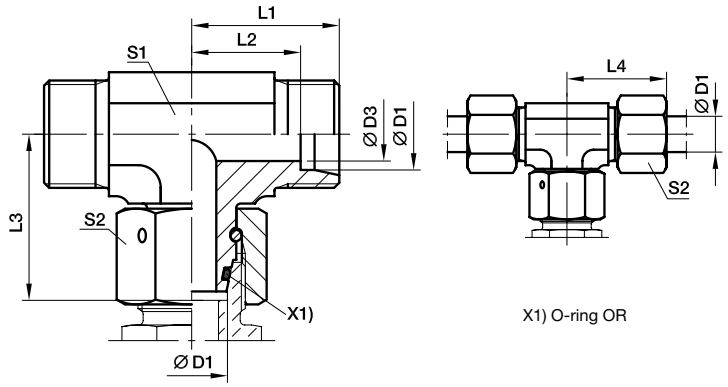

X1) O-ring OR

Series	D1	D3	L1	L2	L3	L4	S1	S2	Weight g/1 piece	Order code*	PN (bar)[1] CF	PN (bar)[1] 71
L[3])	06	4	19	12.0	26.0	27	12	14	42	**ET06LOMD**	500	315
	08	6	21	14.0	27.5	29	12	17	53	**ET08LOMD**	500	315
	10	8	22	15.0	29.0	30	14	19	71	**ET10LOMD**	500	315
	12	10	24	17.0	29.5	32	17	22	97	**ET12LOMD**	400	315
	15	12	28	21.0	32.5	36	19	27	159	**ET15LOMD**	400	315
	18	15	31	23.5	35.5	40	24	32	239	**ET18LOMD**	400	315
	22	19	35	27.5	38.5	44	27	36	308	**ET22LOMD**	250	160
	28	24	38	30.5	41.5	47	36	41	449	**ET28LOMD**	250	160
	35	30	45	34.5	51.0	56	41	50	679	**ET35LOMD**	250	160
	42	36	51	40.0	56.0	63	50	60	1131	**ET42LOMD**	250	160
S[4])	06	4	23	16.0	27.0	31	12	17	63	**ET06SOMD**	800	630
	08	5	24	17.0	27.5	32	14	19	79	**ET08SOMD**	800	630
	10	6	25	17.5	30.0	34	17	22	113	**ET10SOMD**	800	630
	12	8	29	21.5	31.0	38	17	24	136	**ET12SOMD**	630	630
	14	9	30	22.0	35.0	40	19	27	173	**ET14SOMD**	630	630
	16	12	33	24.5	36.5	43	24	30	239	**ET16SOMD**	630	400
	20	16	37	26.5	44.5	48	27	36	388	**ET20SOMD**	420	400
	25	20	42	30.0	50.0	54	36	46	652	**ET25SOMD**	420	400
	30	25	49	35.5	55.0	62	41	50	905	**ET30SOMD**	420	400
	38	32	57	41.0	63.0	72	50	60	1462	**ET38SOMD**	420	315

[1]) Pressure shown = item deliverable

[3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings or alternative sealing materials see page I7.

*Please add the **suffixes** below according to the material/surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additonal. suffix needed)
Steel, zinc plated, Cr(VI)-free	CF	ET16SOMDCF	NBR
Stainless Steel	71	ET16SOMD71	VIT

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark