
EVL standpipe run tee

EO 24° cone end / EO stand pipe adjustable

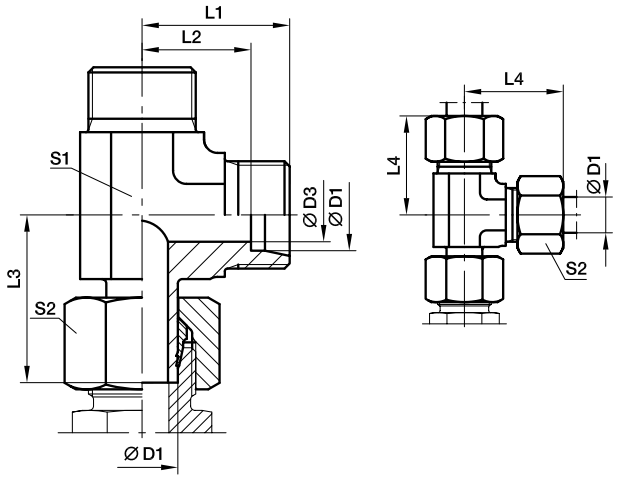

With pre-assembled nut and progressive ring for connection. Final assembly (in appropriate body) at least 1/4 turn beyond the point of clearly perceptible resistance.

Series	D1	D3	L1	L2	L3	L4	S1	S2	Weight g/1 piece	Order code*	PN (bar)[1] CF	71	MS
L[3])	06	4	19	12.0	26.0	27	12	14	40	**EVL06LOMD**	315	315	200
	08	6	21	14.0	27.5	29	12	17	50	**EVL08LOMD**	315	315	200
	10	8	22	15.0	29.0	30	14	19	64	**EVL10LOMD**	315	315	200
	12	10	24	17.0	30.5	32	17	22	93	**EVL12LOMD**	315	315	200
	15	12	28	21.0	32.5	36	19	27	147	**EVL15LOMD**	315	315	200
	18	15	31	23.5	35.5	40	24	32	229	**EVL18LOMD**	315	315	200
	22	19	35	27.5	39.0	44	27	36	296	**EVL22LOMD**	160	160	
	28	24	38	30.5	43.5	47	36	41	416	**EVL28LOMD**	160	160	
	35	30	45	34.5	54.5	56	41	50	661	**EVL35LOMD**	160	160	
	42	36	51	40.0	60.0	63	50	60	1105	**EVL42LOMD**	160	160	
S[4])	06	4	23	16.0	27.0	31	12	17	57	**EVL06SOMD**	630	630	
	08	5	24	17.0	29.0	32	14	19	84	**EVL08SOMD**	630	630	
	10	7	25	17.5	32.0	34	17	22	116	**EVL10SOMD**	630	630	
	12	8	29	21.5	33.0	38	17	24	137	**EVL12SOMD**	630	630	
	14	10	30	22.0	35.0	40	19	27	175	**EVL14SOMD**	400	400	
	16	12	33	24.5	37.5	43	24	30	259	**EVL16SOMD**	400	400	
	20	16	37	26.5	44.5	48	27	36	371	**EVL20SOMD**	400	400	
	25	20	42	30.0	50.5	54	36	46	647	**EVL25SOMD**	400	400	
	30	25	49	35.5	56.5	62	41	50	906	**EVL30SOMD**	400	400	
	38	32	57	41.0	66.5	72	50	60	1549	**EVL38SOMD**	315	315	

[1]) Pressure shown = item deliverable

[3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings see page I7.

Order code suffixes		
Material	Suffix surface and material	Example
Steel, zinc plated, Cr(VI)-free	CF	EVL16SOMDCF
Stainless Steel	71	EVL16SOMD71
Brass	MS	EVL18LOMDMS

*Please add the **suffixes** below according to the material/surface required.

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark