
## F5OG Male female thread adapter

Male UN/UNF thread – O-ring (ISO 11926) / Female NPTF* thread (SAE 476)
*Stainless Steel = NPT to prevent galling

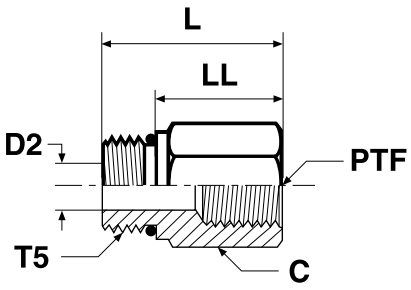


| Thread UN/UNF-2A T5 | Thread NPT/NPTF PTF | C mm | D2 mm | L mm | LL mm | Weight (steel) g/1 piece | Adapter Steel | Adapter Stainless Steel | PN (bar) S | PN (bar) SS |
|---|---|---|---|---|---|---|---|---|---|---|
| 7/16-20 | 1/8-27 | 14.3 | 4.4 | 25 | 16 | 18 | **4-1/8 F5OG-S** | **4-1/8 F5OG-SS** | 420 | 420 |
| 7/16-20 | 1/4-18 | 19 | 4.4 | 30 | 20 | 36 | **4-1/4 F5OG-S** | **4-1/4 F5OG-SS** | 420 | 420 |
| 1/2-20 | 1/8-27 | 16 | 6 | 27 | 18 | 45 | **5-1/8 F5OG-S** | **5-1/8 F5OG-SS** | 420 | 420 |
| 1/2-20 | 1/4-18 | 19 | 6 | 30 | 21 | 55 | **5-1/4 F5OG-S** | **5-1/4 F5OG-SS** | 420 | 420 |
| 9/16-18 | 1/4-18 | 19 | 7.5 | 30 | 20 | 36 | **6-1/4 F5OG-S** | **6-1/4 F5OG-SS** | 420 | 420 |
| 3/4-16 | 1/4-18 | 22.2 | 9.9 | 29 | 18 | 53 | **8-1/4 F5OG-S** | **8-1/4 F5OG-SS** | 420 | 420 |
| 3/4-16 | 3/8-18 | 22.2 | 9.9 | 33 | 21 | 67 | **8-3/8 F5OG-S** | **8-3/8 F5OG-SS** | 420 | 420 |
| 3/4-16 | 1/2-14 | 28.6 | 9.9 | 38 | 27 | 98 | **8-1/2 F5OG-S** | **8-1/2 F5OG-SS** | 350 | 350 |
| 7/8-14 | 1/4-18 | 25.4 | 12.7 | 21 | 8 | 78 | **10-1/4 F5OG-S** | **10-1/4 F5OG-SS** | 380 | 380 |
| 7/8-14 | 3/8-18 | 25.4 | 12.7 | 33 | 21 | 77 | **10-3/8 F5OG-S** | **10-3/8 F5OG-SS** | 380 | 380 |
| 7/8-14 | 1/2-14 | 28.6 | 12.7 | 39 | 26 | 98 | **10-1/2 F5OG-S** | **10-1/2 F5OG-SS** | 350 | 350 |
| 7/8-14 | 3/4-14 | 35 | 12.7 | 41 | 29 | 153 | **10-3/4 F5OG-S** | **10-3/4 F5OG-SS** | 280 | 280 |
| 1 1/16-12 | 1/2-14 | 31.8 | 15.5 | 36 | 21 | 114 | **12-1/2 F5OG-S** | **12-1/2 F5OG-SS** | 350 | 350 |
| 1 1/16-12 | 3/4-14 | 35 | 15.5 | 44 | 29 | 150 | **12-3/4 F5OG-S** | **12-3/4 F5OG-SS** | 280 | 280 |
| 1 3/16-12 | 1/2-14 | 35 | 18.3 | 27 | 12 | 159 | **14-1/2 F5OG-S** | **14-1/2 F5OG-SS** | 280 | 280 |
| 1 3/16-12 | 3/4-14 | 35 | 18.3 | 43 | 28 | 167 | **14-3/4 F5OG-S** | **14-3/4 F5OG-SS** | 280 | 280 |
| 1 5/16-12 | 1/2-14 | 38 | 21.4 | 25 | 10 | 137 | **16-1/2 F5OG-S** | **16-1/2 F5OG-SS** | 280 | 280 |
| 1 5/16-12 | 3/4-14 | 38 | 21.4 | 38 | 23 | 189 | **16-3/4 F5OG-S** | **16-3/4 F5OG-SS** | 280 | 280 |
| 1 5/16-12 | 1-11.5 | 41.3 | 22.2 | 48 | 33 | 216 | **16-1 F5OG-S** | **16-1 F5OG-SS** | 210 | 210 |
| 1 5/8-12 | 1-11.5 | 47.6 | 27.5 | 25 | 10 | 151 | **20-1 F5OG-S** | **20-1 F5OG-SS** | 210 | 210 |
| 1 5/8-12 | 1 1/4-11.5 | 50.8 | 27.5 | 50 | 35 | 191 | **20-1 1/4 F5OG-S** | **20-1 1/4 F5OG-SS** | 170 | 170 |
| 1 7/8-12 | 1-11.5 | 54 | 34.1 | 25 | 10 | 612 | **24-1 F5OG-S** | **24-1 F5OG-SS** | 170 | 170 |
| 1 7/8-12 | 1 1/2-11.5 | 57.4 | 34.1 | 51 | 36 | 653 | **24-1 1/2 F5OG-S** | **24-1 1/2 F5OG-SS** | 140 | 140 |

Parker Adapter are delivered with NBR elastomeric seals as standard. For more details on other seal materials see page O60.

Order codes shown are part of our current manufacturing programme.

Imperial and metric parts may vary in hexagon dimensions.

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

O



Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark