
## Adapters

# FF33M Male nipple

Male BSPT thread (ISO 7)

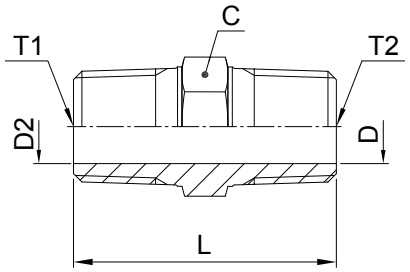


| Thread BSPT T1 | Thread BSPT T2 | C mm | D mm | D2 mm | L mm | Weight (steel) g/1 piece | Adapter Steel | Adapter Stainless Steel | PN (bar) S | PN (bar) SS |
|---|---|---|---|---|---|---|---|---|---|---|
| 1/8-28 | 1/8-28 | 11 | 5 | 5 | 27 | 12 | **1/8FF33MS** | **1/8FF33MSS** | 315 | 315 |
| 1/4-19 | 1/8-28 | 14 | 5 | 5 | 32 | 25 | **1/4X1/8FF33MS** | **1/4X1/8FF33MSS** | 315 | 315 |
| 1/4-19 | 1/4-19 | 14 | 7 | 7 | 37 | 25 | **1/4FF33MS** | **1/4FF33MSS** | 315 | 315 |
| 3/8-19 | 1/4-19 | 17 | 7 | 7 | 37 | 42 | **3/8X1/4FF33MS** | **3/8X1/4FF33MSS** | 315 | 315 |
| 3/8-19 | 3/8-19 | 17 | 10 | 10 | 37 | 30 | **3/8FF33MS** | **3/8FF33MSS** | 315 | 315 |
| 1/2-14 | 1/4-19 | 22 | 7 | 7 | 43 | 68 | **1/2X1/4FF33MS** | **1/2X1/4FF33MSS** | 315 | 315 |
| 1/2-14 | 3/8-19 | 22 | 10.3 | 10.3 | 43 | 67 | **1/2X3/8FF33MS** | **1/2X3/8FF33MSS** | 315 | 315 |
| 1/2-14 | 1/2-14 | 22 | 13.5 | 13.5 | 48 | 72 | **1/2FF33MS** | **1/2FF33MSS** | 315 | 315 |
| 3/4-14 | 1/2-14 | 27 | 13.5 | 13.5 | 50 | 123 | **3/4X1/2FF33MS** | **3/4X1/2FF33MSS** | 160 | 160 |
| 3/4-14 | 3/4-14 | 27 | 18 | 18 | 50 | 110 | **3/4FF33MS** | **3/4FF33MSS** | 160 | 160 |
| 1-11 | 3/4-14 | 36 | 18 | 18 | 55 | 215 | **1X3/4FF33MS** | **1X3/4FF33MSS** | 160 | 160 |
| 1-11 | 1-11 | 36 | 23.8 | 23.8 | 59 | 190 | **1FF33MS** | **1FF33MSS** | 160 | 160 |

Order codes shown are part of our current manufacturing programme.

Imperial and metric parts may vary in hexagon dimensions.

$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.



Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark