
FF5OMX Extended male stud connector

Triple-Lok® 37° Flare end / Male UN/UNF thread – O-ring (ISO 11926)
SAE 070122 MS51526

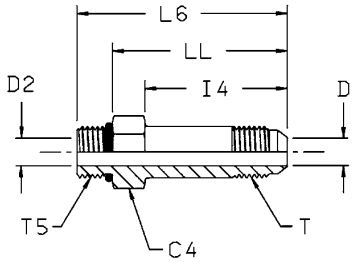

Tube O.D. mm	Tube O.D. in.	Thread UN/UNF-2A T5	Thread UN/UNF-2A T	C4 mm	D mm	D2 mm	I4 mm	L6 mm	LL mm	Weight (steel) g/1 piece	Triple-Lok® Steel	Triple-Lok® Stainless Steel	PN (bar) S	PN (bar) SS
6	1/4	7/16-20	7/16-20	14.3	4.4	4.4	35	53	44	33	**4 FF50X-S**	**4 FF50X-SS**	500	500
10	3/8	9/16-18	9/16-18	17.5	7.5	7.5	40	59	49	53	**6 FF50X-S**	**6 FF50X-SS**	420	420
12	1/2	3/4-16	3/4-16	22.2	9.9	9.9	48	69	58	104	**8 FF50X-S**	**8 FF50X-SS**	420	420
14, 15,16	5/8	7/8-14	7/8-14	25.4	12.3	12.3	53	77	64	151	**10 FF50X-S**	**10 FF50X-SS**	350	350
18, 20	3/4	1 1/16-12	1 1/16-12	31.8	15.5	15.5	64	92	77	277	**12 FF50X-S**	**12 FF50X-SS**	350	350
25	1	1 5/16-12	1 5/16-12	38	21.4	21.4	72	101	86	458	**16 FF50X-S**	**16 FF50X-SS**	280	280
28, 30, 32	1 1/4	1 5/8-12	1 5/8-12	47.6	27.4	27.4	88	119	104	862	**20 FF50X-S**	**20 FF50X-SS**	280	280

Steel, stainless steel and brass Triple-Lok® parts are delivered with NBR elastomeric seals as standard. For more details on other seal materials see page K92.

Order codes shown are part of our current manufacturing programme.

Imperial and metric parts may vary in hexagon dimensions.

$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

K

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark