
FMK4 Male stud connector

BSPP 60° Cone end (ISO 8434-6) / Male NPTF* thread (SAE J476)
*Stainless Steel = NPT to prevent galling

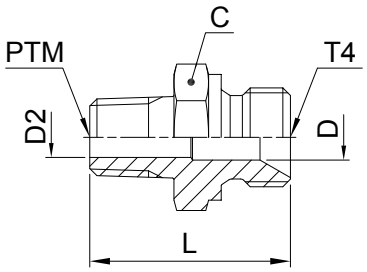

Thread BSPP T4	Thread NPT/NPTF PTM	C mm	D mm	D2 mm	L mm	Weight (steel) g/1 piece	Adapter Steel	Adapter Stainless Steel	PN (bar) S	PN (bar) SS
1/8-28	1/8-28	14	3.5	3.5	24	17	**2FMK4S**	**2FMK4SS**	350	350
1/8-28	1/4-19	14	3.5	3.5	29	21	**2-4FMK4S**	**2-4FMK4SS**	350	350
1/4-19	1/8-28	19	4.7	4.7	29	24	**4FMK4S**	**4FMK4SS**	350	350
1/4-19	1/4-19	19	4.7	4.7	33	33	**4-4FMK4S**	**4-4FMK4SS**	350	350
1/4-19	3/8-19	19	4.7	4.7	33	41	**4-6FMK4S**	**4-6FMK4SS**	350	350
1/4-19	1/2-14	22	4.7	4.7	40	80	**4-8FMK4S**	**4-8FMK4SS**	350	350
3/8-19	1/4-19	22	7.9	7	35	45	**6FMK4S**	**6FMK4SS**	350	350
3/8-19	3/8-19	22	7.9	7.9	35	50	**6-6FMK4S**	**6-6FMK4SS**	350	350
3/8-19	1/2-14	22	7.9	7.9	40	77	**6-8FMK4S**	**6-8FMK4SS**	350	350
1/2-14	3/8-19	27	11.1	10	39	48	**8FMK4S**	**8FMK4SS**	200	200
1/2-14	1/2-14	27	11.1	11.1	43	93	**8-8FMK4S**	**8-8FMK4SS**	200	200
1/2-14	3/4-14	27	11.1	11.1	43	95	**8-12FMK4S**	**8-12FMK4SS**	200	200
3/4-14	1/2-14	32	16.7	13.5	46	112	**12-8FMK4S**	**12-8FMK4SS**	200	200
3/4-14	3/4-14	32	16.7	16.7	46	124	**12FMK4S**	**12FMK4SS**	200	200
3/4-14	1-11	36	16.7	16.7	51	150	**12-16FMK4S**	**12-16FMK4SS**	200	200
1-11	3/4-14	41	22.2	18	50	188	**16-12FMK4S**	**16-12FMK4SS**	120	120
1-11	1-11	41	22.2	22.2	55	234	**16FMK4S**	**16FMK4SS**	120	120
1 1/4-11	1 1/4-11	50	28.6	28.6	64	360	**20FMK4S**	**20FMK4SS**	105	105
1 1/2-11	1 1/2-11	55	33.3	38	69	510	**24FMK4S**	**24FMK4SS**	105	105

Order codes shown are part of our current manufacturing programme.

Imperial and metric parts may vary in hexagon dimensions.

$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark