
## G Union

EO 24°cone end

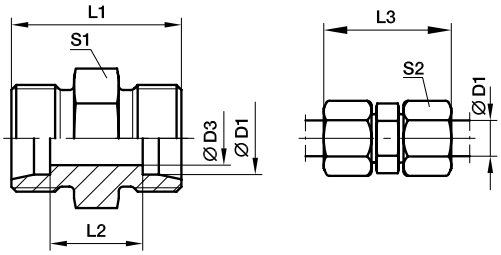


| Series | D1 | D3 | L1 | L2 | L3 | S1 | S2 | Weight g/1 piece | Order code* | PN (bar)[1] CF | 71 | MS |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| LL[2]) | 04 | 3.0 | 20 | 12 | 31 | 9 | 10 | 5 | **G04LL** | 100 | 100 | 63 |
| | 06 | 4.5 | 20 | 9 | 32 | 11 | 12 | 7 | **G06LL** | 100 | 100 | 63 |
| | 08 | 6.0 | 23 | 12 | 35 | 12 | 14 | 10 | **G08LL** | 100 | 100 | 63 |
| | 10 | 8.0 | 23 | 12 | 35 | 14 | 17 | 13 | **G10LL** | 100 | 100 | 63 |
| | 12 | 10.0 | 23 | 11 | 35 | 17 | 19 | 16 | **G12LL** | 100 | 100 | 63 |
| L[3]) | 06 | 4.0 | 24 | 10 | 39 | 12 | 14 | 12 | **G06L** | 500 | 315 | 200 |
| | 08 | 6.0 | 25 | 11 | 40 | 14 | 17 | 16 | **G08L** | 500 | 315 | 200 |
| | 10 | 8.0 | 27 | 13 | 42 | 17 | 19 | 23 | **G10L** | 500 | 315 | 200 |
| | 12 | 10.0 | 28 | 14 | 43 | 19 | 22 | 28 | **G12L** | 400 | 315 | 200 |
| | 15 | 12.0 | 30 | 16 | 46 | 24 | 27 | 51 | **G15L** | 400 | 315 | 200 |
| | 18 | 15.0 | 31 | 16 | 48 | 27 | 32 | 69 | **G18L** | 400 | 315 | 200 |
| | 22 | 19.0 | 35 | 20 | 52 | 32 | 36 | 90 | **G22L** | 250 | 160 | 100 |
| | 28 | 24.0 | 36 | 21 | 54 | 41 | 41 | 137 | **G28L** | 250 | 160 | 100 |
| | 35 | 30.0 | 41 | 20 | 63 | 46 | 50 | 214 | **G35L** | 250 | 160 | 100 |
| | 42 | 36.0 | 43 | 21 | 66 | 55 | 60 | 296 | **G42L** | 250 | 160 | 100 |
| S[4]) | 06 | 4.0 | 30 | 16 | 45 | 14 | 17 | 26 | **G06S** | 800 | 630 | 400 |
| | 08 | 5.0 | 32 | 18 | 47 | 17 | 19 | 37 | **G08S** | 800 | 630 | 400 |
| | 10 | 7.0 | 32 | 17 | 49 | 19 | 22 | 44 | **G10S** | 800 | 630 | 400 |
| | 12 | 8.0 | 34 | 19 | 51 | 22 | 24 | 60 | **G12S** | 630 | 630 | 400 |
| | 14 | 10.0 | 38 | 22 | 57 | 24 | 27 | 77 | **G14S** | 630 | 630 | 400 |
| | 16 | 12.0 | 38 | 21 | 57 | 27 | 30 | 90 | **G16S** | 630 | 400 | 250 |
| | 20 | 16.0 | 44 | 23 | 66 | 32 | 36 | 143 | **G20S** | 420 | 400 | 250 |
| | 25 | 20.0 | 50 | 26 | 74 | 41 | 46 | 251 | **G25S** | 420 | 400 | 250 |
| | 30 | 25.0 | 54 | 27 | 80 | 46 | 50 | 330 | **G30S** | 420 | 400 | 250 |
| | 38 | 32.0 | 61 | 29 | 90 | 55 | 60 | 545 | **G38S** | 420 | 315 | 200 |

[1]) Pressure shown = item deliverable

[2]) LL = very light series; [3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

**Delivery without nut and ring. Information on ordering complete fittings see page I7.**

*Please add the **suffixes** below according to the material/ surface required.

| Order code suffixes | | |
|---|---|---|
| Material | Suffix surface and material | Example |
| Steel, zinc plated, Cr(VI)-free | CFX | G16SCFX |
| Stainless Steel | 71X | G16S71X |
| Brass | MSX | G16SMSX |



Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark