
G63P4 Female swivel connector

JIS BSPP 30° Flare swivel female end (JIS B8363) / Female BSPT thread (ISO 7)

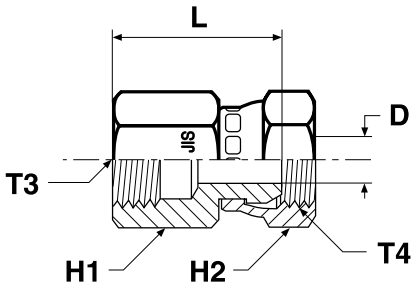


Thread BSPT T3	Thread BSPP T4	D mm	H1 mm	H2 mm	L mm	Weight (steel) g/1 piece	Adapter Steel	PN (bar)
1/4-19	1/4-19	4.5	19	19	30	36	**4G63P4S**	315
3/8-19	3/8-19	7	22.2	22.2	33	49	**6G63P4S**	315
1/2-14	1/2-14	11	27	27	36	73	**8G63P4S**	200
3/4-14	3/4-14	15.9	36.5	36.5	38	163	**12G63P4S**	160
1-11	1-11	21	41.3	41.3	46	195	**16G63P4S**	120

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

G3P4 Female stud connector

JIS BSPP 30° Flare end (JIS B8363) / Female BSPT thread (ISO 7)

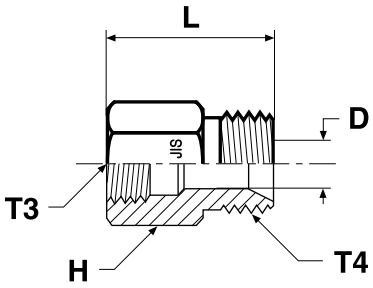

O

Thread BSPT T3	Thread BSPP T4	D mm	H mm	L mm	Weight (steel) g/1 piece	Adapter Steel	PN (bar)
1/4-19	1/4-19	4.5	19	31	40	**4G3P4S**	315
3/8-19	3/8-19	7	22.2	34	55	**6G3P4S**	315
1/2-14	1/2-14	11	27	40	141	**8G3P4S**	200
3/4-14	3/4-14	15.9	36.5	44	159	**12G3P4S**	160
1-11	1-11	21	41.3	49	225	**16G3P4S**	120

Order codes shown are part of our current manufacturing programme.
Imperial and metric parts may vary in hexagon dimensions.

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark