
GMA1 Straight test point fitting with pin-lock — Series 1

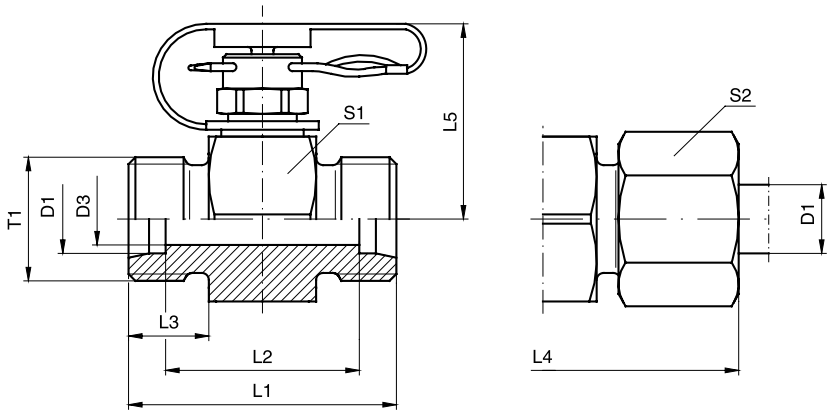

Series	D1	T1	D3	L1	L2	L3	L4	L5	S1	S2	Weight g/1 piece	Order code*	PN (bar)[1] CF	DF**
L[3]	06	M 12×1.5	4	35	21	10	51	29.0	24	14	73	**GMA1/06LOMD**	315	4
	08	M 14×1.5	6	35	21	10	51	29.0	24	17	75	**GMA1/08LOMD**	315	4
	10	M 16×1.5	7	37	23	11	53	29.0	24	19	80	**GMA1/10LOMD**	315	4
	12	M 18×1.5	8	37	23	11	53	30.5	24	22	96	**GMA1/12LOMD**	315	4
	15	M 22×1.5	11	39	25	12	55	32.0	30	27	121	**GMA1/15LOMD**	315	4
	18	M 26×1.5	14	39	24	12	57	33.0	32	32	139	**GMA1/18LOMD**	315	4
	22	M 30×2.0	18	43	28	14	61	35.0	36	36	171	**GMA1/22LOMD**	160	4
S[4]	06	M 14×1.5	4	39	25	12	55	29.0	24	17	82	**GMA1/06SOMD**	400	4
	08	M 16×1.5	5	39	25	12	55	29.0	24	19	88	**GMA1/08SOMD**	400	4
	10	M 18×1.5	7	39	24	12	57	29.0	24	22	90	**GMA1/10SOMD**	400	4
	12	M 20×1.5	7	39	24	12	57	29.0	24	24	96	**GMA1/12SOMD**	400	4
	14	M 22×1.5	10	43	27	14	63	30.5	27	27	121	**GMA1/14SOMD**	400	4
	16	M 24×1.5	11	43	26	14	63	32.0	30	30	138	**GMA1/16SOMD**	400	4
	20	M 30×2.0	15	47	26	16	69	35.0	36	36	222	**GMA1/20SOMD**	400	4

**DF = Design Factor

[1]) Pressure shown = item deliverable

[3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings or alternative sealing materials see page I7.

R

*Please add the **suffixes** below according to the material/ surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additonal. suffix needed)
Steel, zinc plated, Cr(VI)-free	CF	GMA1/06LOMDCF	NBR

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark