
GZ Swivel union

EO 24° DKO swivel

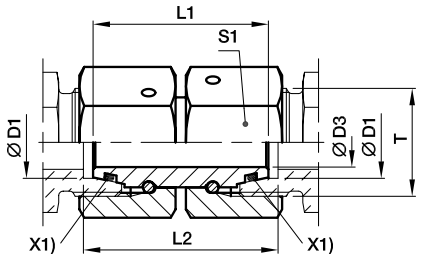

X1) O-ring OR

Series	D1	T	D3	L1	L2	S1	Weight g/1 piece	Order code*	PN (bar)[1] CF	PN (bar)[1] 71
L[3])	06	M 12×1.5	2.5	32	32	14	28	**GZ06L**	500	315
	08	M 14×1.5	4.0	32	32	17	41	**GZ08L**	500	315
	10	M 16×1.5	6.0	33	33	19	53	**GZ10L**	500	315
	12	M 18×1.5	8.0	33	33	22	71	**GZ12L**	400	315
	15	M 22×1.5	10.0	38	38	27	129	**GZ15L**	400	315
	18	M 26×1.5	13.0	36	38	32	165	**GZ18L**	400	315
	22	M 30×2.0	17.0	42	44	36	243	**GZ22L**	250	160
	28	M 36×2.0	22.0	46	48	41	319	**GZ28L**	250	160
	35	M 45×2.0	28.0	48	52	50	449	**GZ35L**	250	160
	42	M 52×2.0	34.0	52	57	60	737	**GZ42L**	250	160
S[4])	06	M 14×1.5	2.5	32	33	17	41	**GZ06S**	800	630
	08	M 16×1.5	4.0	33	34	19	54	**GZ08S**	800	630
	10	M 18×1.5	6.0	33	35	22	74	**GZ10S**	800	630
	12	M 20×1.5	8.0	36	38	24	95	**GZ12S**	630	630
	14	M 22×1.5	9.0	39	41	27	131	**GZ14S**	630	630
	16	M 24×1.5	11.0	39	42	30	172	**GZ16S**	630	400
	20	M 30×2.0	14.0	44	48	36	261	**GZ20S**	420	400
	25	M 36×2.0	18.0	46	53	46	477	**GZ25S**	420	400
	30	M 42×2.0	23.0	52	62	50	605	**GZ30S**	420	400
	38	M 52×2.0	30.0	52	67	60	826	**GZ38S**	420	315

[1]) Pressure shown = item deliverable

[3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Information on ordering complete fittings or alternative sealing materials see page I7.

*Please add the **suffixes** below according to the material/surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additonal. suffix needed)
Steel, zinc plated, Cr(VI)-free	CF	GZ16SCF	NBR
Stainless Steel	71	GZ16S71	VIT

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark