


KH 2-way ball valve stainless steel

EO 24° cone end / EO 24° cone end

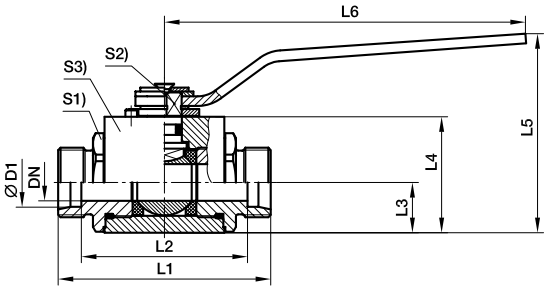


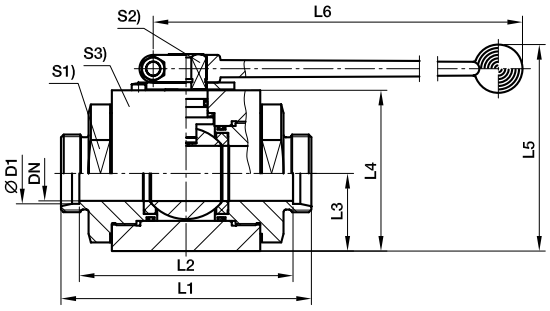

DN 4-25



DN 32-40



Series	D1	DN	L1	L2	L3	L4	L5	L6	L7	S1	S2	S3	S4	Weight g/1 piece	Order code*	PN (bar)[1] 71
L[3]	06	4	73	59	13.7	30.0	56.5	76	88	22	7	30	14	383	**KH06L71X**	500
	08	6	73	59	13.7	30.0	56.5	76	88	22	7	30	17	381	**KH08L71X**	500
	10	8	87	73	18.0	40.0	84.5	130	102	30	8	40	19	809	**KH10L71X**	500
	12	10	87	73	18.0	40.0	84.5	130	102	30	8	40	22	821	**KH12L71X**	500
	15	12	91	77	21.0	45.0	90.0	130	107	32	10	45	27	1020	**KH15L71X**	500
	18	16/12	91	76	21.0	45.0	90.0	130	108	32	10	45	32	1037	**KH18L71X**	500
	22	20	105	87	31.0	65.0	115.0	185	119	46	14	65	36	1610	**KH22L71X**	420
	28	25	112	92	38.0	75.0	125.0	185	125	50	14	75	41	2032	**KH28L71X**	420
	35	32	145	124	45.0	93.2	175.0	320	148	70	19	100	50	4780	**KH35L71X**	420
	42	40	150	114	52.5	104.4	186.0	320	159	80	19	110	60	7754	**KH42L71X**	420
S[4]	08	4	76	62	13.7	30.0	56.5	76	91	22	7	30	19	392	**KH08S71X**	500
	10	6	76	61	13.7	30.0	56.5	76	93	22	7	30	22	460	**KH10S71X**	500
	12	8	89	74	18.0	40.0	84.5	130	106	30	8	40	24	840	**KH12S71X**	500
	14	10	93	77	18.0	40.0	84.5	130	112	30	8	40	27	847	**KH14S71X**	500
	16	12	96	79	21.0	45.0	90.0	130	115	32	10	45	30	1055	**KH16S71X**	500
	20	16/12	99	78	21.0	45.0	90.0	130	121	32	10	45	36	1079	**KH20S71X**	500
	25	20	113	86	31.0	65.0	115.0	185	134	46	14	65	46	1720	**KH25S71X**	420
	30	25	124	93	38.0	75.0	125.0	185	146	50	14	75	50	2150	**KH30S71X**	420
	38	32	145	100	45.0	93.2	175.0	320	161	70	19	100	60	6066	**KH38S71X**	420

[1] Pressure shown = item deliverable

[3] L = light series; [4] S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings or alternative sealing materials see page I7.

*Please add the **suffixes** below according to the material/ surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additional suffix needed)
Stainless Steel	without	KH06L71X	POM / NBR

P

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark