

KH 2-way BSPP ball valve stainless steel

Female BSPP thread (ISO 1179-1) / Female BSPP thread (ISO 1179-1)

DN 4-25

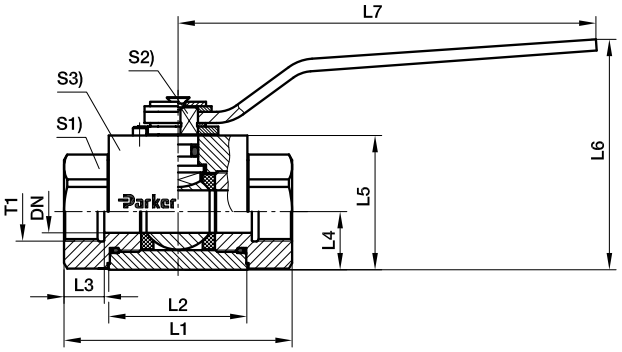

DN 32-40

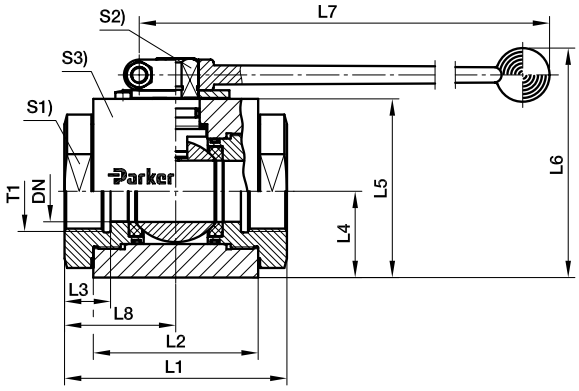

T1	DN	L1	L2	L3	L4	L5	L6	L7	L8	S1	S2	S3	Weight g/1 piece	Order code*	PN(bar)[1] 71
G 1/8	4	69	41	11	13.7	30.0	56.5	76	–	22	7	30	421	**KH1/871X**	500
G 1/4	6	75	41	14	13.7	30.0	56.5	76	–	22	7	30	422	**KH1/471X**	500
G 3/8	10	86	53	14	18.0	40.0	84.5	130	–	30	8	40	891	**KH3/871X**	500
G 1/2	12	92	55	16	21.0	45.0	90.0	130	–	32	10	45	1093	**KH1/271X**	500
G 3/4	20	111	65	18	31.0	65.0	115.0	185	–	46	14	65	1944	**KH3/471X**	420
G 1	25	122	71	20	38.0	75.0	125.0	185	–	50	14	75	2200	**KH171X**	420
G 1 1/4	32	110	86	24	45.0	93.2	175.0	320	55	70	19	100	5300	**KH11/471X**	420
G 1 1/2	40	120	92	26	52.2	104.4	186.0	320	60	80	19	110	7230	**KH11/271X**	420

[1]) Pressure shown = item deliverable

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings or alternative sealing materials see page I7.

P

*Please add the **suffixes** below according to the material/ surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additional suffix needed)
Stainless Steel	without	KH1/871X	POM / NBR

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark