
LE-R (KEG) Male stud run tee

EO 24° cone end / Male short BSP taper thread (DIN 3852-2, type C)

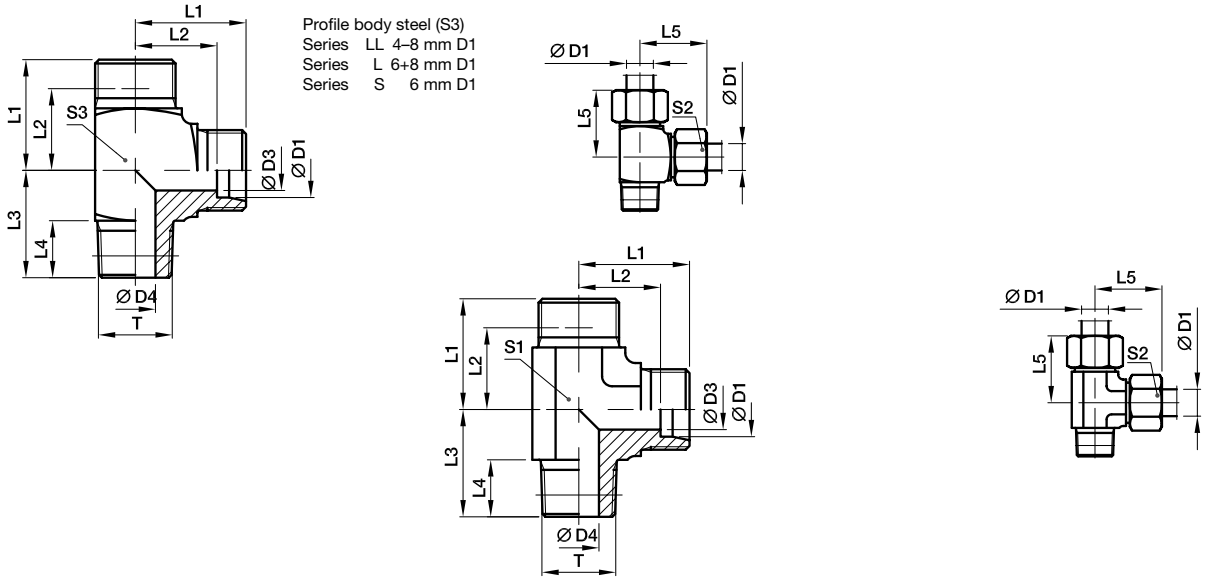

Profile body steel (S3)
Series LL 4–8 mm D1
Series L 6+8 mm D1
Series S 6 mm D1

Series	D1	T	D3	D4	L1	L2	L3	L4	L5	S1	S2	S3	Weight g/1 piece	Order code*	PN (bar)[1] CF	PN (bar)[1] 71
LL[2])	04	R 1/8 tap.	3.0	4.0	15	11.0	17	8	21	9	10	11	20	**LE04LLR**	100	100
	06	R 1/8 tap.	4.5	4.5	15	9.5	17	8	21	9	12	11	21	**LE06LLR**	100	100
	08	R 1/8 tap.	6.0	6.0	17	11.5	20	8	23	12	14	12	28	**LE08LLR**	100	100
L[3])	06	R 1/8 tap.	4.0	4.0	19	12.0	20	8	27	12	14	12	40	**LE06LR**	315	315
	08	R 1/4 tap.	6.0	6.0	21	14.0	26	12	29	12	17	14	57	**LE08LR**	315	315
	10	R 1/4 tap.	8.0	7.0	22	15.0	27	12	30	14	19		50	**LE10LR**	315	315
	12	R 3/8 tap.	10.0	9.0	24	17.0	28	12	32	17	22		60	**LE12LR**	315	315
	15	R 1/2 tap.	12.0	11.0	28	21.0	34	14	36	19	27		115	**LE15LR**	315	315
	18	R 1/2 tap.	15.0	14.0	31	23.5	36	14	40	24	32		145	**LE18LR**	315	315
S[4])	06	R 1/4 tap.	4.0	4.0	23	16.0	26	12	31	12	17	14	71	**LE06SR**	400	400
	08	R 1/4 tap.	5.0	5.0	24	17.0	27	12	32	14	19		62	**LE08SR**	400	400
	10	R 3/8 tap.	7.0	7.0	25	17.5	28	12	34	17	22		82	**LE10SR**	400	400
	12	R 3/8 tap.	8.0	8.0	29	21.5	28	12	38	17	24		102	**LE12SR**	400	400
	14	R 1/2 tap.	10.0	10.0	30	22.0	32	14	40	19	27		130	**LE14SR**	400	400
	16	R 1/2 tap.	12.0	12.0	33	24.5	32	14	43	24	30		193	**LE16SR**	400	400

[1]) Pressure shown = item deliverable

[2]) LL = very light series; [3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings see page I7.

*Please add the **suffixes** below according to the material/surface required.

Order code suffixes		
Material	Suffix surface and material	Example
Steel, zinc plated, Cr(VI)-free	CFX	LE16SRCFX
Stainless Steel	71X	LE16SR71X

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark