
PWDA Gear pump flange 90° elbow 3 holes – aluminium

Hydraulic flange / Female BSPP thread
(ISO 1179-1)

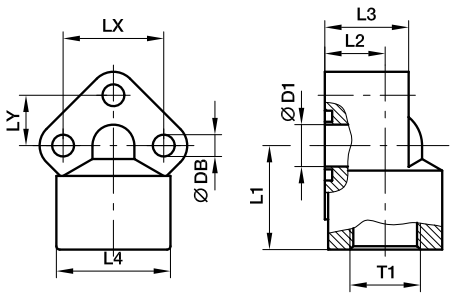

PWDA 90° Female BSPP thread

Pump size	LK	T1	D1	L1	L2	L3	L4	LX	LY	DB	Screws (metr.)	O-ring	Weight (steel) kg/piece	Order code*	PN (bar)[1] A
0.5	26	**G 3/8**	10.0	31	18.0	25	31	26	13.0	5.5	M 05×35	14.00×1.78	0.06	**PWDA-05/38**	180
0.5	26	**G 1/2**	10.0	31	18.0	25	31	26	13.0	5.5	M 05×35	14.00×1.78	0.06	**PWDA-05/12**	180
1.0	30	**G 3/8**	12.5	31	18.0	26	34	30	15.0	6.5	M 06×35	15.88×2.62	0.08	**PWDA-1/38**	180
1.0	30	**G 1/2**	12.5	31	18.0	26	34	30	15.0	6.5	M 06×35	15.88×2.62	0.08	**PWDA-1/12**	180
2.0	40	**G 1/2**	18.0	40	21.5	31	42	40	20.0	8.5	M 08×45	22.22×2.62	0.15	**PWDA-2/12**	180
2.0	40	**G 3/4**	18.0	40	21.5	31	42	40	20.0	8.5	M 08×45	22.22×2.62	0.15	**PWDA-2/34**	180
3.0*	51	**G 3/4**	24.5	46	26.0	42	49	56	25.5 –28	11.0	M 10×60	29.75×3.53	0.32	**PWDA-3/34**	180
3.0*	51	**G 1**	24.5	46	26.0	42	49	56	25.5 –28	11.0	M 10×60	29.75×3.53	0.32	**PWDA-3/100**	180

[1]) Pressure shown = Item deliverable

*Oval drill hole

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

*Please add the **suffixes** below according to the material/surface required.

Order code suffixes			
Material	Suffix surface and material	Example incl. metr. screws and O-ring	Standard sealing material (no additional suffix needed)
Aluminium	A	PWDA-05/38AM	NBR

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark