
PWDS-G Gear pump flange 90° elbow 4 holes – aluminium

Hydraulic flange / Female BSPP thread
(ISO 1179-1)

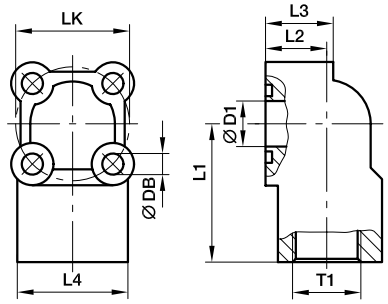

PWDS-G 90° Female BSPP thread

LK	T1	D1	L1	L2	L3	L4	DB	Screws 2 pieces (metr.)	Screws 2 pieces (metr.)	O-ring	Weight (steel) kg/piece	Order code*	PN (bar)[1] A
30	**G 3/8**	11.5	39.0	18	20	33	6.5	M 06×30	M 06×40	15.88×2.62	0.09	**PWDS-G38/LK30**	180
30	**G 1/2**	11.5	39.0	18	20	33	6.5	M 06×30	M 06×40	15.88×2.62	0.09	**PWDS-G12/LK30**	180
35	**G 3/8**	14.0	42.5	18	20	34	6.5	M 06×30	M 06×40	18.72×2.62	0.11	**PWDS-G38/LK35**	180
35	**G 1/2**	14.0	42.5	18	20	34	6.5	M 06×30	M 06×40	18.72×2.62	0.11	**PWDS-G12/LK35**	180
40	**G 1/2**	18.0	47.5	24	28	41	6.5	M 06×40	M 06×50	22.22×2.62	0.18	**PWDS-G12/LK40**	180
40	**G 3/4**	18.0	47.5	24	28	41	6.5	M 06×40	M 06×50	22.22×2.62	0.18	**PWDS-G34/LK40**	180
55	**G 3/4**	24.5	54.0	29	31	49	8.5	M 08×45	M 08×60	29.75×3.53	0.31	**PWDS-G34/LK55**	180
55	**G 1**	24.5	54.0	29	31	49	8.5	M 08×45	M 08×60	29.75×3.53	0.30	**PWDS-G1/LK55**	180

[1]) Pressure shown = Item deliverable

$\frac{\text{PN (bar)}}{10}$ = PN (M0Pa)

N

*Please add the **suffixes** below according to the material/surface required.

Order code suffixes			
Material	Suffix surface and material	Example incl. metr. screws and O-ring	Standard sealing material (no additional suffix needed)
Aluminium	A	PWDS-G38/LK30AM	NBR

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark