
RHDI Non return valve

Female BSPP thread (ISO 1179-1) / Female BSPP thread (ISO 1179-1)

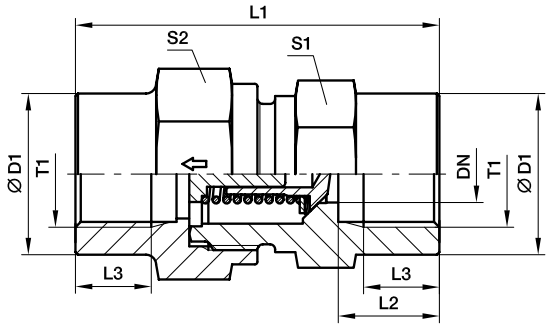

Series	T1	DN	D1	L1	L2	L3	S1	S2	Weight g/1 piece	Order code*	PN (bar)[1] CF	PN (bar)[1] 71
L[3])	G 1/8	3.5	19	42.5	12.0	8.0	19	19	76	**RHDI1/8**	400	400
	G 1/4	3.5	19	51.0	16.0	12.0	19	19	82	**RHDI1/4**	400	400
	G 3/8	7.5	24	60.0	17.0	12.0	24	27	157	**RHDI3/8**	400	400
	G 1/2	11.5	32	72.0	20.0	15.0	32	36	344	**RHDI1/2**	315	315
	G 3/4	15.0	41	84.0	22.0	16.5	41	46	664	**RHDI3/4**	250	250
	G 1	19.0	46	95.0	25.5	19.0	46	50	821	**RHDI1**	250	250
	G 1 1/4	24.0	60	110.0	28.0	21.5	60	60	1581	**RHDI11/4**	250	250
	G 1 1/2	29.0	65	114.0	28.5	22.0	65	70	1919	**RHDI11/2**	250	250

[1]) Pressure shown = item deliverable

[3]) L = light series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Delivery without nut and ring. Information on ordering complete fittings or alternative sealing materials see page I7.

*Please add the **suffixes** below according to the material/ surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additional suffix needed)
Steel, zinc plated, Cr(VI)-free	CF	RHDI1/8CF	NBR
Stainless steel	71	RHDI1/871	VIT

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark