
## TE-M(KEG) Male stud branch tee

EO 24° cone end / Male short metric taper thread (DIN 3852-1, type C)

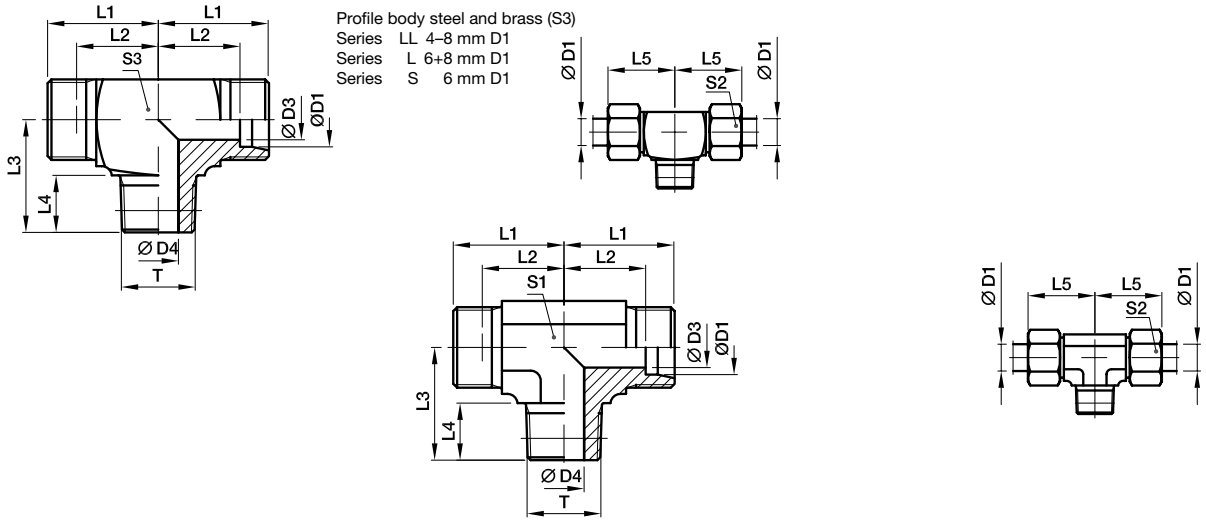


| Series | D1 | T | D3 | D4 | L1 | L2 | L3 | L4 | L5 | S1 | S2 | S3 | Weight g/1 piece | Order code* | PN (bar)[1] CF | PN (bar)[1] 71 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| LL[2]) | 04 | M 08×1.0 tap. | 3.0 | 3.5 | 15 | 11.0 | 17 | 8 | 21 | 9 | 10 | 9 | 17 | **TE04LLM** | 100 | 100 |
| | 06 | M 10×1.0 tap. | 4.5 | 4.5 | 15 | 9.5 | 17 | 8 | 21 | 9 | 12 | 11 | 20 | **TE06LLM** | 100 | 100 |
| | 08 | M 10×1.0 tap. | 6.0 | 6.0 | 17 | 11.5 | 20 | 8 | 23 | 12 | 14 | 12 | 29 | **TE08LLM** | 100 | 100 |
| L[3]) | 06 | M 10×1.0 tap. | 4.0 | 4.0 | 19 | 12.0 | 20 | 8 | 27 | 12 | 14 | 12 | 38 | **TE06LM** | 315 | 315 |
| | 08 | M 12×1.5 tap. | 6.0 | 6.0 | 21 | 14.0 | 26 | 12 | 29 | 12 | 17 | 14 | 54 | **TE08LM** | 315 | 315 |
| | 10 | M 14×1.5 tap. | 8.0 | 7.0 | 22 | 15.0 | 27 | 12 | 30 | 14 | 19 | | 45 | **TE10LM** | 315 | 315 |
| | 12 | M 16×1.5 tap. | 10.0 | 9.0 | 24 | 17.0 | 28 | 12 | 32 | 17 | 22 | | 60 | **TE12LM** | 315 | 315 |
| | 15 | M 18×1.5 tap. | 12.0 | 11.0 | 28 | 21.0 | 32 | 12 | 36 | 19 | 27 | | 100 | **TE15LM** | 315 | 315 |
| | 18 | M 22×1.5 tap. | 15.0 | 14.0 | 31 | 23.5 | 36 | 14 | 40 | 24 | 32 | | 149 | **TE18LM** | 315 | 315 |
| S[4]) | 06 | M 12×1.5 tap. | 4.0 | 4.0 | 23 | 16.0 | 26 | 12 | 31 | 12 | 17 | 14 | 69 | **TE06SM** | 400 | 400 |
| | 08 | M 14×1.5 tap. | 5.0 | 5.0 | 24 | 17.0 | 27 | 12 | 32 | 14 | 19 | | 98 | **TE08SM** | 400 | 400 |
| | 10 | M 16×1.5 tap. | 7.0 | 7.0 | 25 | 17.5 | 28 | 12 | 34 | 17 | 22 | | 82 | **TE10SM** | 400 | 400 |
| | 12 | M 18×1.5 tap. | 8.0 | 8.0 | 29 | 21.5 | 28 | 12 | 38 | 17 | 24 | | 106 | **TE12SM** | 400 | 400 |
| | 14 | M 20×1.5 tap. | 10.0 | 10.0 | 30 | 22.0 | 32 | 14 | 40 | 19 | 27 | | 126 | **TE14SM** | 400 | 400 |
| | 16 | M 22×1.5 tap. | 12.0 | 12.0 | 33 | 24.5 | 32 | 14 | 43 | 24 | 30 | | 177 | **TE16SM** | 400 | 400 |

[1]) Pressure shown = item deliverable

[2]) LL = very light series; [3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

**Delivery without nut and ring. Information on ordering complete fittings see page I7.**

| Order code suffixes | | |
|---|---|---|
| Material | Suffix surface and material | Example |
| Steel, zinc plated, Cr(VI)-free | CFX | TE16SMCFX |
| Stainless Steel | 71X | TE16SM71X |

*Please add the **suffixes** below according to the material/surface required.



Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark