
VKA1 Test point fitting with pin lock for cones — Series 1

With 24° cone swivel nut connection

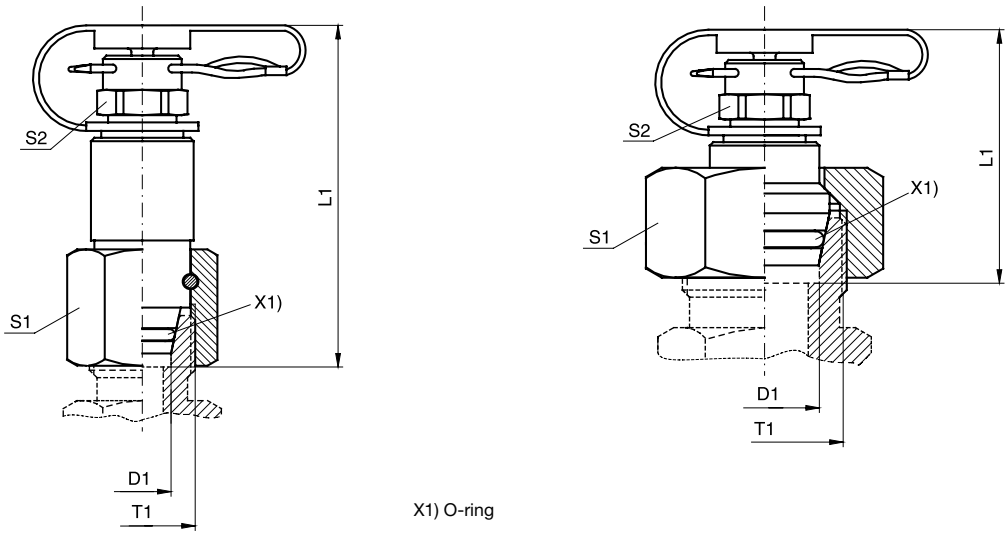

X1) O-ring

Series	D1	T1	L1	S1	S2	Fig.	Weight g/1 piece	Order code*	PN (bar)1) CF	DF**
L[3])	06	M 12×1.5	48	14	12	A	44	**VKA1/06L**	315	4
	08	M 14×1.5	49	17	12	A	54	**VKA1/08L**	315	4
	10	M 16×1.5	50	19	12	A	68	**VKA1/10L**	315	4
	12	M 18×1.5	51	22	12	A	81	**VKA1/12L**	315	4
	15	M 22×1.5	39	27	12	B	82	**VKA1/15L**	315	4
	18	M 26×1.5	38	32	12	B	112	**VKA1/18L**	315	4
S[4])	06	M 14×1.5	48	17	12	A	51	**VKA1/06S**	400	4
	08	M 16×1.5	50	19	12	A	62	**VKA1/08S**	400	4
	10	M 18×1.5	50	22	12	A	78	**VKA1/10S**	400	4
	12	M 20×1.5	51	24	12	A	100	**VKA1/12S**	400	4
	14	M 22×1.5	39	27	12	B	88	**VKA1/14S**	400	4
	16	M 24×1.5	37	30	12	B	105	**VKA1/16S**	400	4
	20	M 30×2.0	44	36	12	B	174	**VKA1/20S**	400	4

**DF = Design Factor

[1]) Pressure shown = item deliverable

[3]) L = light series; [4]) S = heavy series

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

*Please add the **suffixes** below according to the material/ surface required.

Order code suffixes			
Material	Suffix surface and material	Example	Standard sealing material (no additonal. suffix needed)
Steel, zinc plated, Cr(VI)-free	CF	VKA1/06LCF	NBR

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark