
797TC

No-Skive GlobalCore Compact Spiral™

Tough Cover

Size -4 exceeds ISO 18752-AC
Sizes -8 to -20 exceed ISO 18752-DC
Sizes -6, -24, -32 exceed ISO 18752-CC

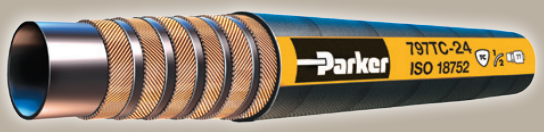

- 1/2 the bend radius of SAE 100R15
- Constant working pressure of 42.0 MPa
- Reduced O.D. and new construction lead to superior flexibility
- 1/3 less effort to bend
- Weight reduction – up to 26 %
- Highly abrasion resistant **TOUGH** COVER
- MSHA approved
- Hose is suitable for temporary immersion in mineral oil up to 70 °C with frequent inspections

Primary Applications

On- & offshore, construction, injection moulding, mining

Type Approvals

Details please find on pages ***Ab-16*** to ***Ab-19***

Applicable Specifications

Exeeds SAE 100R15 – ISO 3862 Type R15 –
ISO 18752-AC/CC/DC

Construction

Inner tube: Proprietary synthetic rubber
Reinforcement: Two-braid steel wire for size -4,
Four- or six-compact spiral steel wires for size -6 to -32
Cover: Highly abrasion resistance
MSHA approved synthetic rubber

Temperature Range ..... -40 °C up to +125 °C (size -4 up to +100 °C)

Exception: Air ..... max. +70 °C
Water ..... max. +85 °C

Recommended Fluids

Petroleum based hydraulic fluids and lubricating oils. Wide Compatibility exceeding Column III, with additional chemical resistance, especialy for diesel and biodiesel. Consult the chemical compatibility section on pages ***Ab-26*** to ***Ab-34*** for more detailed information.

Fitting Series

Series 43/48 for size-4





Series 43 for size -6



Series 77 for sizes -8 up to -32



Part Number	Hose I.D.				Hose O.D.	Pressure Rating: max. working pressure		Pressure Rating: min. burst pressure		min. bend radius	weight
	DN	Inch	Size	mm	mm	MPa	psi	MPa	psi	mm	kg
797TC-4	6	1/4	4	6.3	13.0	42.0	6000	168.0	24000	50	0.31
797TC-6	10	3/8	-6	10.0	17.0	42.0	6000	168.0	24000	63	0.46
797TC-8	12	1/2	-8	12.7	21.1	42.0	6000	168.0	24000	100	0.67
797TC-10	16	5/8	-10	15.9	23.9	42.0	6000	168.0	24000	115	0.80
797TC-12	19	3/4	-12	19.1	27.9	42.0	6000	168.0	24000	135	1.16
797TC-16	25	1	-16	25.4	35.7	42.0	6000	168.0	24000	165	1.74
797TC-20	31	1 1/4	-20	31.8	44.9	42.0	6000	168.0	24000	225	2.89
797TC-24	38	1 1/2	-24	38.1	52.8	42.0	6000	168.0	24000	305	3.96
797TC-32	51	2	-32	50.8	67.6	42.0	6000	168.0	24000	380	6.50

Replace the hose when any deformation or damage on the hose cover are visible.
The combination of high temperature and high pressure could reduce the hose life.

Hose layline example



Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark