
V3P4 Male 45° elbow

JIS BSPP 60° Cone end (JIS B8363) / Male BSPT thread (ISO 7)




Thread BSPP T4	Thread BSPT T3	D mm	D2 mm	L4 mm	L6 mm	Y mm	Weight (steel) g/1 piece	Adapter Steel	PN (bar)
1/4-19	1/4-19	4.5	4.5	19	21	14	36	**4V3P4S**	350
3/8-19	3/8-19	7	7	22	23	19	65	**6V3P4S**	350
1/2-14	1/2-14	11	11	27	27	22	122	**8V3P4S**	200
3/4-14	3/4-14	15.9	15.9	30	30	27	159	**12V3P4S**	200
1-11	1-11	21	21	35	33	33.3	412	**16V3P4S**	120

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

F63P4 Swivel male stud

JIS BSPP 60° Cone swivel female end (JIS B8363) / Male BSPT thread (ISO 7)

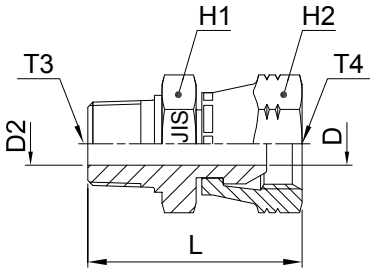

Thread BSPT T3	Thread BSPP T4	D mm	D2 mm	H1 mm	H2 mm	L mm	Weight (steel) g/1 piece	Adapter Steel	Adapter Stainless Steel	PN (bar) S	PN (bar) SS
1/4-19	1/4-19	4.5	4.5	19	19	33	41	**4F63P4S**	**4F63MP4SS**	315	315
3/8-19	3/8-19	7	7	22.2	22.2	37	70	**6F63P4S**	**6F63MP4SS**	315	315
1/2-14	1/2-14	11	11	27	27	42	122	**8F63P4S**	**8F63MP4SS**	200	200
3/4-14	3/4-14	15.9	15.9	36.5	36.5	47	254	**12F63P4S**	**12F63MP4SS**	160	160
1-11	1-11	21	21	41.3	41.3	52	367	**16F63P4S**	**16F63MP4SS**	120	120

Order codes shown are part of our current manufacturing programme.
Imperial and metric parts may vary in hexagon dimensions.

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark