
Adapters

0107 Swivel male stud

Male NPTF* thread (SAE J476) / NPSM Female swivel end (SAE J516)
SAE 140130
*Stainless Steel = NPT to prevent galling

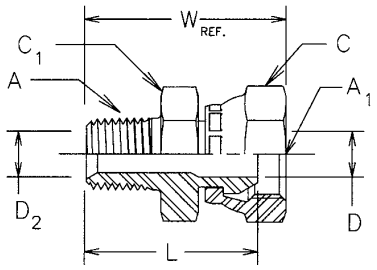

Thread NPTF A	Thread NPSM A1	C mm	C1 mm	D mm	D2 mm	L mm	W mm	Weight (steel) g/1 piece	Adapter Steel	Adapter Stainless Steel	PN (bar) S	PN (bar) SS
1/8-27	1/8-27	14.3	14.3	4	4.8	24	28	23	**0107-2-2**	**0107-2-2-SS**	350	350
1/8-27	1/4-18	17.5	16	4.8	4.8	27	32	33	**0107-2-4**	**0107-2-4-SS**	350	350
1/4-18	1/4-18	17.5	17.5	5.6	7.1	32	36	40	**0107-4-4**	**0107-4-4-SS**	350	350
1/4-18	3/8-18	22.2	20.6	7.1	7.1	32	37	57	**0107-4-6**	**0107-4-6-SS**	280	280
1/4-18	1/2-14	25.4	23.8	11.9	7.1	37	44	91	**0107-4-8**	**0107-4-8-SS**	245	245
3/8-18	1/4-18	17.5	17.5	5.6	10.3	33	38	48	**0107-6-4**	**0107-6-4-SS**	350	350
3/8-18	3/8-18	22.2	22.2	8.7	10.3	33	38	62	**0107-6-6**	**0107-6-6-SS**	280	280
3/8-18	1/2-14	25.4	23.8	10.3	10.3	37	44	97	**0107-6-8**	**0107-6-8-SS**	245	245
1/2-14	3/8-18	22.2	22.2	8.7	13.5	38	43	76	**0107-8-6**	**0107-8-6-SS**	280	280
1/2-14	1/2-14	25.4	25.4	11.9	13.5	41	49	109	**0107-8-8**	**0107-8-8-SS**	245	245
1/2-14	3/4-14	31.8	31.8	13.5	13.5	43	52	167	**0107-8-12**	**0107-8-12-SS**	140	140
3/4-14	1/2-14	25.4	28.6	11.9	18.3	41	49	122	**0107-12-8**	**0107-12-8-SS**	245	245
3/4-14	3/4-14	31.8	31.8	16.3	18.3	43	52	154	**0107-12-12**	**0107-12-12-SS**	140	140
3/4-14	1-11.5	38	38	21.4	18.3	46	55	247	**0107-12-16**	**0107-12-16-SS**	120	120
1-11.5	3/4-14	31.8	35	16.3	23.8	49	58	217	**0107-16-12**	**0107-16-12-SS**	140	140
1-11.5	1-11.5	38	38	21.4	23.8	51	60	238	**0107-16-16**	**0107-16-16-SS**	120	120
1-11.5	1 1/4-11.5	47.6	44.5	29	23.8	51	61	298	**0107-16-20**	**0107-16-20-SS**	120	120
1 1/4-11.5	1-11.5	38	47.6	21.4	31.8	53	63	356	**0107-20-16**	**0107-20-16-SS**	120	120
1 1/4-11.5	1 1/4-11.5	47.6	47.6	29	31.8	53	63	390	**0107-20-20**	**0107-20-20-SS**	120	120
1 1/2-11.5	1 1/2-11.5	54	54	34.5	38.1	56	66	498	**0107-24-24**	**0107-24-24-SS**	85	85
2-11.5	2-11.5	66.7	66.7	46.1	49.2	60	71	749	**0107-32-32**	**0107-32-32-SS**	75	75

Order codes shown are part of our current manufacturing programme.

Imperial and metric parts may vary in hexagon dimensions.

$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark