
F3P4 Male stud connector

JIS BSPP 60° Cone end (JIS B8363) / Male BSPT thread (ISO 7)

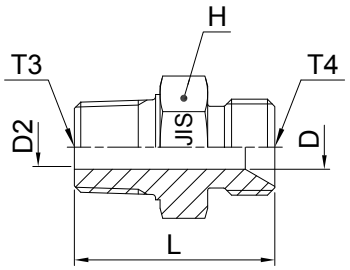


Thread BSPP T4	Thread BSPT T3	D mm	D2 mm	H mm	L mm	Weight (steel) g/1 piece	Adapter Steel	Adapter Stainless Steel	PN (bar) S	PN (bar) SS
1/4-19	1/4-19	4.5	4.5	19	37	47	**4F3P4S**	**4F3MP4SS**	315	315
3/8-19	3/8-19	7	7	22.2	38	67	**6F3P4S**	**6F3MP4SS**	315	315
1/2-14	1/2-14	11	11	27	46	109	**8F3P4S**	**8F3MP4SS**	200	200
3/4-14	3/4-14	15.9	15.9	36.5	52	195	**12F3P4S**	**12F3MP4SS**	160	160
1-11	1-11	21	21	41.3	58	292	**16F3P4S**	**16F3MP4SS**	120	120

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

C3P4 Male 90° elbow

JIS BSPP 60° cone end (JIS B8363) / Male BSPT thread (ISO 7)



O

Thread BSPP T4	Thread BSPT T3	D mm	D2 mm	L1 mm	L3 mm	Y mm	Weight (steel) g/1 piece	Adapter Steel	PN (bar)
1/4-19	1/4-19	4.5	4.5	25	24	14	49	**4C3P4S**	315
3/8-19	3/8-19	7	7	30	29	19	97	**6C3P4S**	315
1/2-14	1/2-14	11	11	36	33	22	147	**8C3P4S**	200
3/4-14	3/4-14	15.9	15.9	43	40	27	206	**12C3P4S**	160
1-11	1-11	21	21	50	44	33.3	434	**16C3P4S**	120

Order codes shown are part of our current manufacturing programme.
Imperial and metric parts may vary in hexagon dimensions.

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark