
FUSM SAE Flange clamps with metric tapped holes

ISO 6162-1/-2

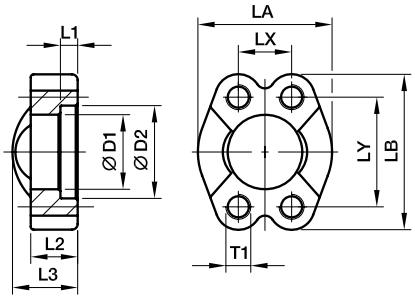

3000 PSI Series

Nom. flange size SAE (in.)	Nom. flange size ISO (DN)	D1	D2	L1	L2	L3	LA	LB	LX	LY	T1	Weight (steel) kg/piece	Order code*	PN (bar)[1] CF	PN (bar)[1] SS
1/2	13	24.3	31.0	6.2	13	20	46	54.0	17.5	38.1	**M 8**	0.15	**FUSM32**	345	345
3/4	19	32.1	38.9	6.2	14	22	52	65.0	22.3	47.6	**M10**	0.17	**FUSM33**	345	345
1	25	38.5	45.2	7.5	16	24	59	69.9	26.2	52.4	**M10**	0.22	**FUSM34**	345	345
1 1/4	32	43.7	51.6	7.5	16	22	73	79.4	30.2	58.7	**M10**	0.30	**FUSM35/10**	276	276
1 1/4	32	43.7	51.6	7.5	16	22	73	79.4	30.2	58.7	**M12**	0.29	**FUSM35/12**	276	276
1 1/2	38	50.8	61.1	7.5	16	25	83	93.8	35.7	69.9	**M12**	0.45	**FUSM36**	207	207
1 1/2	38	50.8	61.1	7.5	16	25	83	93.8	35.7	69.9	**M14**	0.44	**FUSM36/14**	207	207
2	51	62.8	72.3	9.0	16	26	97	101.6	42.9	77.8	**M12**	0.50	**FUSM38/12**	207	207
2	51	62.8	72.3	9.0	16	26	97	101.6	42.9	77.8	**M14**	0.49	**FUSM38**	207	207
2 1/2	64	74.9	84.9	9.0	19	38	109	114.3	50.8	88.9	**M12**	0.74	**FUSM310**	172	172
2 1/2	64	74.9	84.9	9.0	19	38	109	114.3	50.8	88.9	**M14**	0.73	**FUSM310/14**	172	172
3	76	90.9	102.4	9.0	22	41	131	135.0	61.9	106.4	**M16**	1.30	**FUSM312**	138	138
3 1/2	89	102.4	115.0	10.7	23	28	140	152.4	69.9	120.7	**M16**	1.50	**FUSM314**	34	34
4	102	115.1	127.8	10.7	25	35	150	162.0	77.8	130.2	**M16**	1.65	**FUSM316**	34	34
5	127	140.5	153.2	10.7	28	41	180	184.2	92.1	152.4	**M16**	2.50	**FUSM320**	34	34

6000 PSI Series

1/2	13	24.6	32.5	7.2	16	22	48	56.4	18.2	40.5	**M 8**	0.16	**FUSM62**	420	420
3/4	19	32.5	42.0	8.2	19	28	60	71.4	23.8	50.8	**M10**	0.35	**FUSM63**	420	420
1	25	38.9	48.4	9.0	24	33	70	81.0	27.8	57.2	**M12**	0.53	**FUSM64**	420	420
1 1/4	32	44.5	54.8	9.8	27	38	78	95.3	31.8	66.6	**M14**	0.80	**FUSM65**	420	420
1 1/2	38	51.6	64.3	12.1	30	43	96	112.8	36.5	79.3	**M16**	1.35	**FUSM66**	420	420
2	51	67.6	80.2	12.1	37	52	114	133.4	44.5	96.8	**M20**	2.10	**FUSM68**	420	420
2 1/2	64	90.0	108.9	20.5	45	45	150	180.0	58.7	123.8	**M24**	4.10	**FUSM610**	420	420
3	76	115.0	132.5	25.5	55	55	178	215.0	71.4	152.4	**M30**	8.60	**FUSM612**	420	420

[1] Pressure shown = Item deliverable

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

N

*Please add the **suffixes** below according to the material/surface required.

Order code suffixes			
Material	Suffix surface and material	Example only flange clamp with metr. threads	Description
Steel, zinc plated, Cr(VI)-free	CF	FUSM32CFM	only flange clamp
Stainless steel	SS	FUSM32SSM	only flange clamp

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark