
Adapters

R6MK4 Swivel nut run tee

BSPP 60° Cone ends (ISO 8434-6) / BSPP 60° Female swivel end (ISO 8434-6)

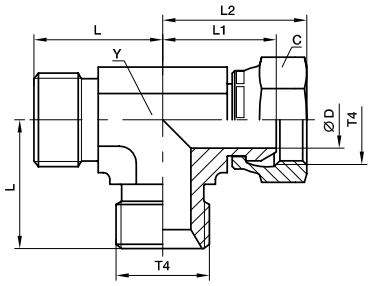

Thread BSPP T4	C mm	D mm	L mm	L1 mm	L2 mm	Y mm	Weight (steel) g/1 piece	Adapter Steel	Adapter Stainless Steel	PN (bar) S	PN (bar) SS
1/8-28	14	3.5	17	18	23	11	29	**2R6MK4S**	**2R6MK4SS**	350	350
1/4-19	19	4.7	24	25	31	14	77	**4R6MK4S**	**4R6MK4SS**	350	350
3/8-19	22	7.9	27	26	33	19	128	**6R6MK4S**	**6R6MK4SS**	350	350
1/2-14	27	11.1	32	32	39	22	203	**8R6MK4S**	**8R6MK4SS**	200	200
5/8-14	30	14.3	34	30	40	22	274	**10R6MK4S**	**10R6MK4SS**	200	200
3/4-14	32	16.7	36	33	42	27	274	**12R6MK4S**	**12R6MK4SS**	200	200
1-11	41	22.2	42	38	49	33	456	**16R6MK4S**	**16R6MK4SS**	120	120
1 1/4-11	50	28.6	48	48	58	41	801	**20R6MK4S**	**20R6MK4SS**	105	105

Order codes shown are part of our current manufacturing programme.

Imperial and metric parts may vary in hexagon dimensions.

$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

Tel: +45 63 12 83 00 | Email: ps@hymatik.com | www.hymatik.com | Hvidkaervej 27a, DK-5250 Odense SV, Denmark